

Product Manual 26640 (Revision A, 6/2023)
Original Instructions

RTCnet™ / LINKnet™ HT Nodes

Installation and Operation Manual



General Precautions

Read this entire manual and all other publications pertaining to the work to be performed before installing, operating, or servicing this equipment.

Practice all plant and safety instructions and precautions.

Failure to follow instructions can cause personal injury and/or property damage.



This publication may have been revised or updated since this copy was produced. The latest version of most publications is available on the Woodward website.

Revisions

http://www.woodward.com

If your publication is not there, please contact your customer service representative to get the latest copy.



Proper Use

Any unauthorized modifications to or use of this equipment outside its specified mechanical, electrical, or other operating limits may cause personal injury and/or property damage, including damage to the equipment. Any such unauthorized modifications: (i) constitute "misuse" and/or "negligence" within the meaning of the product warranty thereby excluding warranty coverage for any resulting damage, and (ii) invalidate product certifications or listings.



If the cover of this publication states "Translation of the Original Instructions" please note:

Translated Publications

The original source of this publication may have been updated since this translation was made. The latest version of most publications is available on the Woodward website.

www.woodward.com/publications

Always compare with the original for technical specifications and for proper and safe installation and operation procedures.

If your publication is not on the Woodward website, please contact your customer service representative to get the latest copy.

Revisions—Changes in this publication since the last revision are indicated by a black line alongside the text.

Woodward reserves the right to update any portion of this publication at any time. Information provided by Woodward is believed to be correct and reliable. However, no responsibility is assumed by Woodward unless otherwise expressly undertaken.

Contents

WARNINGS AND NOTICES	
ELECTROSTATIC DISCHARGE AWARENESS	6
REGULATORY COMPLIANCE	
CHAPTER 1. GENERAL INFORMATION	
Introduction	
RTCnet Product Family	10
LINKnet HT Product Family	10
Environmental Specifications	1 ²
CHAPTER 2. RTCNET AND LINKNET HT DISTRIBUTED I/O NETWO	
Product Compatibility	12
Network Wiring Considerations	
Network Examples with MicroNet	
Network Power Distribution	
CAN Network Communications	14
CHAPTER 3. INSTALLATION	
Introduction	
Shipping Carton	
General Installation	
Mounting Requirements	
Outline Drawing for Nodes Outline Drawing for T/C High Accuracy Node	
General Wiring Guidance	
Node Replacement / HotSwap	
Commissioning Checklist	
5	
CHAPTER 4. RTD NODES (8CH)	
Description and FeaturesBlock Diagram	
Specifications	
RTD Curve Limits	
Configuration	
Connector Pinouts	
Field Wiring and Diagrams	
Status Indicators and Trouble Codes	
CHAPTER 5. THERMOCOUPLE NODES (8CH)	
Description and Features	
Block Diagram	
Specifications	
Thermocouple Curve Limits	
Configuration	39
Connector Pinouts	39
Field Wiring and Diagrams	
Status Indicators and Trouble Codes	4
CHAPTER 6. AIO 4–20 MA NODES (8IN, 2OUT)	
Description and Features	
Block Diagram	
Specifications	
Configuration	
Connector Pinouts	
Field Wiring and Diagrams	
Status Indicators and Trouble Codes	48

CHAPTER 7. DISCRETE INPUT NODES (16CH)	
Description and Features	
Block Diagram	
Specifications	
Configuration	
Connector Pinouts	
Field Wiring and DiagramsStatus Indicators and Trouble Codes	
CHAPTER 8. DISCRETE OUT RELAY DRIVER NODES (16CH)	55
Description and Features	
Block Diagram	
Specifications	
Configuration	
Connector Pinouts	
Field Wiring and Diagrams	
Status Indicators and Trouble Codes	
CHAPTER 9. PRODUCT SUPPORT AND SERVICE OPTIONS	61
Product Support Options	61
Product Service Options	
Returning Equipment for Repair	
Replacement Parts	
Engineering Services	
Contacting Woodward's Support Organization	
Technical Assistance	
REVISION HISTORY	65
DECLARATIONS	
DECLARATIONS	00
Illustrations and Tables	
Illustrations and Tables	
Figure 1-1. RTCnet, Real-Time	
Figure 1-1. RTCnet, Real-TimeFigure 1-2. LINKnet HT Products	10
Figure 1-1. RTCnet, Real-TimeFigure 1-2. LINKnet HT Products	10 12
Figure 1-1. RTCnet, Real-Time	10 12 13
Figure 1-1. RTCnet, Real-Time	10 12 13
Figure 1-1. RTCnet, Real-Time	10 12 13 20
Figure 1-1. RTCnet, Real-Time	

Released

Manual 26640 RTCnet / LINKnet HT Nodes Table 5-1. Input Power Connector Pinout 39 Table 5-2. CAN Connector Pinout 39 Table 5-3. TC Fault/Status Indicators 41 Table 6-1. Input Power Connector Pinout 46 Table 6-2. CAN Connector Pinout 46 Table 6-3. AIO Fault/Status Indicators 49 Table 7-1. Input Power Connector Pinout 52 Table 7-2. CAN Connector Pinout 52 Table 8-1. Input Power Connector Pinout 54 Table 8-1. Input Power Connector Pinout 58 Table 8-2. CAN Connector Pinout 58 Table 8-3. DOUT Fault/Status Indicators 60

The following are trademarks of Woodward, Inc.:

GAP

LINKnet

MicroNet

RTCnet

Warnings and Notices

Important Definitions



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

- **DANGER**—Indicates a hazardous situation which, if not avoided, will result in death or serious injury.
- WARNING—Indicates a hazardous situation which, if not avoided, could result in death or serious injury.
- CAUTION—Indicates a hazardous situation which, if not avoided, could result in minor or moderate
 injury.
- NOTICE—Indicates a hazard that could result in property damage only (including damage to the control).
- **IMPORTANT**—Designates an operating tip or maintenance suggestion.



IOLOCK. When a CPU or I/O module fails, watchdog logic drives it into an IOLOCK condition where all output circuits and signals are driven to a known de-energized state as described below. The System MUST be designed such that IOLOCK and power OFF states will result in a SAFE condition of the controlled device.

CPU and I/O module failures will drive the module into an IOLOCK state

CPU failure will assert an IOLOCK signal to all modules and expansion racks to drive them into an IOLOCK state.

Discrete outputs / relay drivers will be non-active and de-energized Analog and Actuator outputs will be non-active and de-energized with zero voltage or zero current.

The IOLOCK state is asserted under various conditions including CPU and I/O module watchdog failures

Power Up and Power Down conditions.

System reset and hardware/software initialization

Entering configuration mode

NOTE: Additional watchdog details and any exceptions to these failure states are specified in the related CPU or I/O module section of the manual.



Overspeed /
Overtemperature /
Overpressure

The engine, turbine, or other type of prime mover should be equipped with an overspeed shutdown device to protect against runaway or damage to the prime mover with possible personal injury, loss of life, or property damage.

The overspeed shutdown device must be totally independent of the prime mover control system. An overtemperature or overpressure shutdown device may also be needed for safety, as appropriate.



Personal Protective Equipment The products described in this publication may present risks that could lead to personal injury, loss of life, or property damage. Always wear the appropriate personal protective equipment (PPE) for the job at hand. Equipment that should be considered includes but is not limited to:

Eye Protection Hearing Protection Hard Hat

Gloves Safety Boots Respirator

Always read the proper Material Safety Data Sheet (MSDS) for any working fluid(s) and comply with recommended safety equipment.



Start-up

Be prepared to make an emergency shutdown when starting the engine, turbine, or other type of prime mover, to protect against runaway or overspeed with possible personal injury, loss of life, or property damage.



Automotive Applications On- and off-highway Mobile Applications: Unless Woodward's control functions as the supervisory control, customer should install a system totally independent of the prime mover control system that monitors for supervisory control of engine (and takes appropriate action if supervisory control is lost) to protect against loss of engine control with possible personal injury, loss of life, or property damage.



Battery Charging Device

To prevent damage to a control system that uses an alternator or battery-charging device, make sure the charging device is turned off before disconnecting the battery from the system.

Electrostatic Discharge Awareness

NOTICE

Electrostatic Precautions

Electronic controls contain static-sensitive parts. Observe the following precautions to prevent damage to these parts:

- Discharge body static before handling the control (with power to the control turned off, contact a grounded surface and maintain contact while handling the control).
- Avoid all plastic, vinyl, and Styrofoam (except antistatic versions) around printed circuit boards.
- Do not touch the components or conductors on a printed circuit board with your hands or with conductive devices.

To prevent damage to electronic components caused by improper handling, read and observe the precautions in Woodward manual 82715, Guide for Handling and Protection of Electronic Controls, Printed Circuit Boards, and Modules.

Follow these precautions when working with or near the control.

- 1. Avoid the build-up of static electricity on your body by not wearing clothing made of synthetic materials. Wear cotton or cotton-blend materials as much as possible because these do not store static electric charges as much as synthetics.
- 2. Do not remove the printed circuit board (PCB) from the control cabinet unless absolutely necessary. If you must remove the PCB from the control cabinet, follow these precautions:
 - Do not touch any part of the PCB except the edges.
 - Do not touch the electrical conductors, the connectors, or the components with conductive devices or with your hands.
 - When replacing a PCB, keep the new PCB in the plastic antistatic protective bag it comes in until you are ready to install it. Immediately after removing the old PCB from the control cabinet, place it in the antistatic protective bag.

Regulatory Compliance

European Compliance for CE Marking:

These listings are limited only to those units bearing the CE Marking.

EMC Directive: Directive 2014/30/EU of the European Parliament and of the Council

of 26 February 2014 on the harmonization of the laws of the Member

States relating to electromagnetic compatibility (EMC).

ATEX—Potentially Explosive Atmospheres

Potentially Directive 2014/34/EU of the European Parliament and of the Council of 26 February 2014 on the harmonization of the laws of the Member Directive: States relating to equipment and protective systems intended for use

in potentially explosive atmospheres.

II 3 G, Ex nA IIC T4 Gc

United Kingdom Compliance for UKCA Marking:

These listings are limited only to those units bearing the UKCA Marking.

S.I. 2016 No. 1107 Equipment and Protective Systems Intended for use in Potentially

Explosive Atmospheres Regulations 2016

II 3 G, Ex nA IIC T4 Gc

S.I. 2016 No. 1091 Electromagnetic Compatibility Regulations 2016

North American Compliance:

These listings are limited only to those units bearing the CSA identification.

cCSAus: CSA Certified for Class I, Division 2, Groups A, B, C,

& D, T4 at 100 °C surrounding air temperature. For

use in Canada and the United States.

CSA Certificate 2494650

(See Compliance Notes below)

Marine Compliance:

American Bureau of ABS 2022 Marine Vessel Rules: 4-2-1/7.3, 4-2-1/7.5.1, 4-9-5/17, 4-9-

Shipping: 9/13 & 4-9-9/Table 1 (as appropriate).

ABS 2022 Mobile Offshore Units Rules: 4-1-1/7.7, 4-3-1/11, 4-3-1/15,

4-3-1/17, 4-3-3/3.1, 4-3-4/5.

Det Norske Veritas: Det Norske Veritas - Class Guideline - DNV-CG-0339, Edition 2021-

08.

Product(s) is rated: Temperature B, Humidity B, Vibration A, EMC A, Enclosure - Required protection according to DNV Rules shall be

provided upon installation on board.

Lloyd's Register Of LR Test Specification Number 1, December 2021. For use in

Shipping: environmental categories ENV1, ENV2 and ENV3 as defined in LR

Test Specification No. 1, December 2021.

Compliance Notes:

This equipment is suitable for use in Class I, Division 2, Groups A, B, C, D T4 at 100 °C surrounding air temperature per CSA for Canada and US or non-hazardous locations only.

This equipment is suitable for use in European Zone 2, Group IIC environments when installed in an IP54 minimum rated enclosure per self-declaration to EN 60079-15.

RTCnet and LINKnet HT nodes are open-type equipment that are installed in a suitable enclosure of final application, with combination subject to acceptance to the Local Inspection Authority having jurisdiction.

Field wiring must be in accordance with North American Class I, Division 2 (CEC and NEC), or European Zone 2, Category 3 wiring methods as applicable, and in accordance with the Local Inspection Authority having jurisdiction.

The modules must be installed in a vertical position in an enclosure with a minimum IP54 rating to meet the cyclic Damp Heat requirements of Marine Agency Type Approval. Refer to the installation chapter in the product manual(s) for the specific mounting position during installation.

Special Conditions for Safe Use:

Field wiring must be suitable for at least 10 °C above ambient conditions during operation.

This equipment must be installed in an area or enclosure providing adequate protection against impact and the entry of dust or water.

For ATEX compliance, the user-provided enclosure must have a minimum IP54 ingress protection rating per IEC 60529 and meet the construction requirements of IEC 60079-15. The interior of the enclosure shall not be accessible in normal operation without the use of a tool.

The DIN-rail clip is the primary earth connection. The PE connection should be used when required for harsh environments where the DIN-rail ground may be compromised over time.

A build-up of electrostatic charge is avoided by proper maintenance of final installation.



EXPLOSION HAZARD—Do not connect or disconnect while circuit is live unless area is known to be non-hazardous.

Substitution of components may impair suitability for Class I, Division 2 applications.



RISQUE D'EXPLOSION—Ne pas raccorder ni débrancher tant que l'installation est sous tension, sauf en cas l'ambiance est décidément non dangereuse.

La substitution de composants peut rendre ce matériel inacceptable pour les emplacements de Classe I, applications Division 2.

Chapter 1. General Information

Introduction

Woodward RTCnet and LINKnet HT distributed I/O nodes are small CANopen based modules designed for turbine control in harsh vibration and temperature environments.

Woodward Control Systems like MicroNet Plus can easily program these nodes to gather I/O sensor data from remote locations. Woodward's Graphical Application Program (GAP) software provides automatic node initialization, RateGroup operation, and diagnostic features when using these nodes to control:

- Gas and steam turbines
- Gas and diesel engines
- Hydro turbines

Because RTCnet and LINKnet HT nodes may be skid mounted with the turbine or engine, typical installation and maintenance costs for cables, sensor wiring, and field troubleshooting can be significantly reduced.

Product Highlights

- Suitable for skid mounted turbine and engine control markets
- Designed for high temperature and high vibration operation
- RTCnet products are designed for real-time, deterministic operation
- LINKnet HT products are designed to support slower, non-critical I/O
- Designed for easy integration with Woodward controls like MicroNet Plus
- Provides Plug-N-Play integration with Woodward GAP software and RateGroups
- Provides a convenient upgrade path for older LINKnet distributed I/O nodes

Features and I/O

- High temperature operating range of –40 °C to +100 °C
- High vibration operation for skid mount vibration and shock levels
- 18 V to 36 V (dc) isolated input power with isolated CAN communications
- RT, real-time version with deterministic and synchronous updates of 10 ms to 160 ms
- HT, asynchronous, non real-time version with 100 ms to 1 second update rates
- RTCnet products have (2) CAN ports to support redundant network and cabling

A MicroNet Plus Control system using RTCnet / LINKnet HT nodes with Woodward's GAP software provides a powerful control environment. Woodward's unique RateGroup structure ensures that control functions execute with determinism at intervals defined by the system engineer. GAP allows critical control loops to be processed as fast as 5 milliseconds while less critical code is assigned to a slower execution rate like 160 ms. The RateGroup structure prevents the possibility of changing system dynamics when adding additional code so the control functions are always deterministic and predictable.

RTCnet / LINKnet node configuration, diagnostics, and monitoring are provided through standard MicroNet and GAP tools like Monitor GAP and SOS OPC server.

RTCnet Product Family

RTCnet products are focused on real-time deterministic I/O with redundant CAN ports. These nodes support MicroNet Plus CPU failover and are designed to operate in high temperature and high vibration environments.

Node Types:

- (8ch) RTD Input (100 Ω , 200 Ω)
- (8ch) High Accuracy Thermocouple Input (K, N, E, J, R, S, T, B, mV)
- (10ch) AIO 4 mA to 20 mA In/Out (8AI, 2AO) (loop & self-power versions)
- (16ch) Discrete Input
- (16ch) Discrete Out Relay Driver



Figure 1-1. RTCnet, Real-Time

LINKnet HT Product Family

LINKnet HT products provide for slower, asynchronous distributed I/O with a single CAN port. These nodes support MicroNet Plus CPU failover and are designed to operate in high temperature and high vibration environments.

Node Types

- (8ch) RTD Input (100 Ω, 200 Ω)
- (8ch) Thermocouple Input (K, N, E, J, R, S, T, B, mV)
- (10ch) AIO 4 mA to 20 mA In/Out (8AI, 2AO) (loop & self-power versions)
- (16ch) Discrete Input
- (16ch) Discrete Out Relay Driver

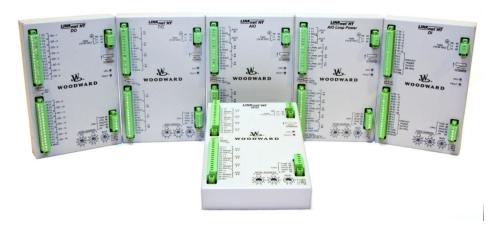


Figure 1-2. LINKnet HT Products

Environmental Specifications

These specifications apply to both RTCnet and LINKnet HT product lines.

Operating Temperature	-40 °C to +100 °C		
Storage Temperature	-40 °C to +105 °C, recommend 20 °C to 40 °C for		
	long life		
Vibration	8.2 Grms, industrial skid mount, per Woodward RV1		
Shock	40 G, 3x each axis, per Woodward MS1		
Humidity ¹	5 % to 95 %, non-condensing		
Ingress Rating / Installation ²	IP20, Pollution Degree2, Overvoltage Category 3		
EMC Emissions	EN 61000-6-4 (Heavy Industrial)		
	IACS UR E10 (Commercial Marine)		
EMC Immunity	EN 61000-6-2 (Heavy Industrial)		
-	IACS UR E10 (Commercial Marine)		

¹Cyclic condensing humidity is supported with selection of an appropriate enclosure.

Electromagnetic Compatibility (EMC)

The RTCnet and LINKnet HT products comply with Heavy Industrial EMC requirements per EN 61000-6-4 & EN 61000-6-2 specifications. Marine Type Approval is also met per IACS UR E10 EMC test requirements.

Emissions EN 61000-6-4 & IACS UR E10

- Radiated RF Emissions Limits 150 kHz to 3000 MHz per IEC 61000-6-4 & Marine Type Approval.
- Power Line Conducted RF Emissions Limits 10 kHz to 30 MHz per IEC 61000-6-4 & Marine Type Approval.

Immunity EN 61000-6-2 & IACS UR E10

- Electrostatic Discharge (ESD) immunity to ±6 kV Contact, except to I/O pins, and ±8 kV Air per IEC 61000-4-2.
- ±6 kV Contact to I/O pins, operational with deviations and ±8 kV Package and Handling without damage.
- Radiated RF Immunity to 10 V/m, from 80 MHz to 3000 MHz per IEC 61000-4-3.
- Electrical Fast Transients (EFT) Immunity to ±2.0 kV, kHz 5 & 100 kHz rep rate on I/O and Power input cabling per IEC 61000-4-4.
- Surge Immunity (PS) to ±1.0 kV CM and ±0.5 kV DM per IEC 61000-4-5.
- Surge Immunity (I/O) to ±1.0 kV CM per IEC 61000-4-5.
- Conducted RF Immunity to 10 V (rms) from 150 kHz to 80 MHz per IEC 61000-4-6.
- Conducted Low Frequency Injection Immunity to 3.6 V (rms), ≤ 2 W Power, from 50 Hz to 12 kHz on Power Inputs per Marine Type Approval test requirements.
- Conducted Low Frequency Injection Immunity to 3.6 V to 0.36 V (rms), ≤ (2 to 0.2) W Power, 12 kHz to 150 kHz on Power Inputs, extended from Marine Type Approval test requirements.

²ATEX, IP54, and Pollution Degree 3 are supported with an appropriate enclosure.


Chapter 2. RTCnet and LINKnet HT Distributed I/O Networks

Product Compatibility

The RTCnet and LINKnet HT product families are compatible with the MicroNet Plus simplex and redundant CPU platforms. GAP3.04 and Coder 6.0 or later software tools are required. Contact Woodward Marketing and Sales for compatibility with other Woodward products.

Network Wiring Considerations

The CAN network may be routed using either a simple daisy-chain wiring strategy or a Trunk and daisy-chain wiring strategy. The primary requirement is that the CAN network is terminated with 120 Ω ±10 Ω resistors at each end of the "trunk" cable.

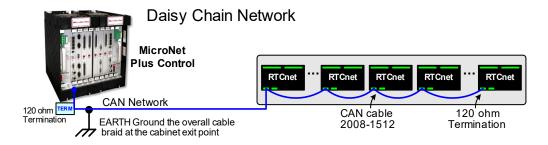


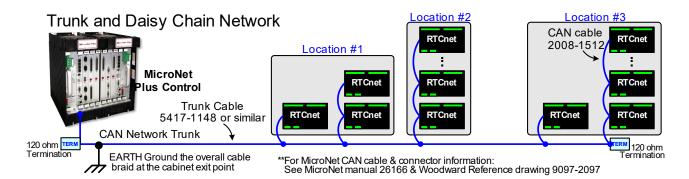


Figure 2-1. Network Wiring— Daisy Chain or Trunk and Daisy Chain



Network Examples with MicroNet

The following is an example MicroNet Plus, redundant CPU system using RTCnet and LINKnet HT products. The MicroNet CPU's are directly connected to a group of RTCnet nodes and the RTN Gateway is used to interface with (2) other node groups.

This example shows redundant CPU's and multiple node locations supported with Woodward's RTN Gateway. It also shows redundant RTCnet CAN network wiring and redundant RTN networking to the RTN Gateway.

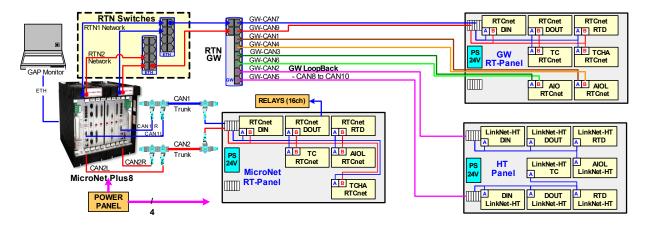


Figure 2-2. Redundant CPU's and Multiple Node Locations



Reference Information:

- Manual 26640—For RTCnet and LINKnet HT nodes.
- Manual 26166—For MicroNet RTN Ethernet switches and cables.
- Manual 26612—For RTN Gateway information, cables, and setup.

Useful Woodward Part Numbers at the Time of Writing

CAN Cables (reference drawing 9097-2097)			
5417-1127	Cable - CAN MicroNet drop, 7/8 inch male to M12 female (1 m)		
5417-1142	Cable - CAN drop, 7/8 inch male to pigtail (1 m, mid gauge)		
5417-1148	Cable - CAN mid trunk cable (3 m, mid guage)		
1635-1463			
1635-1464	Connector - CAN terminator 7/8 inch, male 121 Ω		
1635-1465	Connector - CAN terminator 7/8 inch, female 121 Ω		
2008-1512	Cable - CAN RTCnet High Temp (1.5 pair, 0.3 mm² / 22 AWG, 125 °C)		
8923-1889	KIT - RTCnet CAN termination resistor (121 Ω, qty 20)		
Misc.			
5417-394	Cable - Double Shielded CAT-5 Ethernet (SSTP), 10 foot		
1752-423	Hirschmann Copper Ethernet switch (RS2-TX, 8 port)		
1711-1069	Hirschmann Fiber Optic Switch (RS2-4TX/1FX)		
1751-6077	Hirschmann Fiber Optic Switch (RS2-3TX/2FX)		
1730-221	General Purpose Relay (24 V dc, 10 A, "ice cube")		
1731-757	Socket - DIN rail base for relay 1730-221		

Network Power Distribution

Power Bus Distribution: The primary power distribution bus should be < 300 m with a recommended wire size of 3 mm² / 12 AWG or larger. It is expected that it will be broken out to smaller distribution wires at the final location. Wires should be routed with positive and negative together, but they don't need to be twisted. When the optional EARTH terminal is used at the nodes, it should be routed as short as possible to an earth/chassis enclosure connection.



Longer cable runs and complex power distribution designs may require a more detailed power system analysis. For best performance, it is important to control the total input source resistance to < 5.4 Ω and total input source inductance to < 300 $\mu H.$

Power Wiring to nodes: Wires routed from the main bus to feed the nodes shall be 0.5 mm² / 20 AWG to allow daisy chaining the power from node to node. It is recommended that the power daisy chain be limited to 16 nodes of any combination.

Power Fusing: Breaker or power-line fusing is recommended to protect the power wiring network from possible wiring shorts. The breaker or fuse rating for a group of nodes should be at least 1.5 A (time-delay type) per AlO node and 0.75 A (time-delay type) per all other node types to avoid nuisance trips. Due to the isolated input PS design, each node does not need individual fuse protection, but should still be fuse protected in strategic groups.

Power Wiring / Shielding: No shield is required; however, it is allowed and beneficial in harsh corrosive environments. If used, it should be EARTH terminated to a DIN rail or panel connection with as short a wire as possible. See the cable shield preparation and the node grounding sections for specific guidance.

CAN Network Communications

RTCnet and LINKnet HT nodes communicate with the master controller (i.e.: MicroNet) using the CAN protocol. Both RTCnet and LINKnet HT nodes support MicroNet dual CPU's and failover operation.

Note: RTCnet nodes have (2) redundant CAN ports and LINKnet HT nodes provide only (1) CAN port.


CAN Specifications

Interface Standard	CAN 2.0B		
Network Connections	(2) Redundant CAN ports, separate connectors		
Network Isolation	500 V (ac) to chassis, input power, I/O channels, between CAN ports		
Network Speed/Length	1 Mbit @ 30 m		
	500 Kbit @ 100 m		
	250 Kbit @ 250 m (thick cable only, otherwise limited to 100 m)		
	125 Kbit @ 500 m (thick cable only, otherwise limited to 100 m)		
Network Termination:	$(120 \pm 10) \Omega$ is required at each end of the network trunk line.		
	**The termination resistor is NOT built into the node hardware.		
Node Address	(2) Rotary switches shall configure the node address (range of 1–99).		
Baud Rate configuration	rotary switch selectable for 125 K, 500 K, 250 K, and 1 Mbit		
Cable / Part Number	2008-1512 (120 Ω, 3-wire, shielded twisted pair)		
	—Belden YR58684 or similar		
Cable Drops (1 Mbit)	CAN Cable drops shall be < 1 m and as short as possible		
Cable Drops (500K, etc)	CAN Cable drops shall be < 6 m and as short as possible		

^{**}If needed, a recommended CAN to USB converter is IXXAT, HW221245 (isolated).

CAN Cable Specifications

<u>Belden YR58684</u>, high temperature communications / CAN cable is approved and recommended. This is a smaller and more flexible 0.3 mm² / 22 AWG, low capacitance cable suitable for tight routing between nodes in high temperature environments.

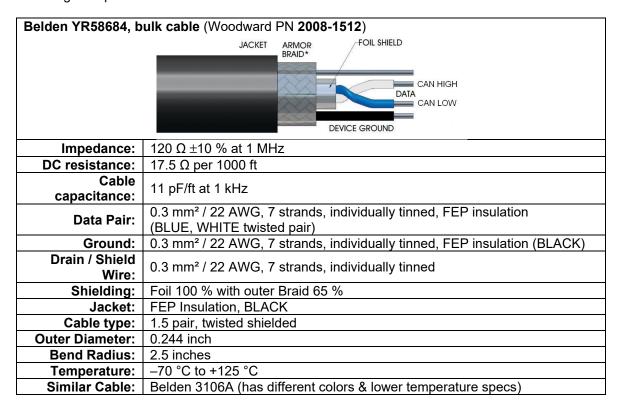

CAN Cable Shield Terminations & Exposed Cable Limitations

For robust communications performance, the CAN cabling needs to minimize the exposed, non-shielded cable section that occurs at terminal blocks. The exposed length of CAN wiring must be limited to less than 3.8 cm / 1.5 inches from the end of the shield to the terminal block. This limits the total length of exposed wiring during a series or daisy chain connection on each side of the terminal block to 7.6 cm / 3 inches.

CAN shields are terminated to chassis (EARTH) through a capacitor-resistor network. This is designed into the RTCnet / LINKnet HT nodes, RTN Gateway, and MicroNet products. However, the shield must also be directly terminated to chassis (Earth) at one point in the network. In the case of Woodward equipment, the direct ground is meant to be located at the master device end, as it exits the master device's enclosure.



Always use shielded cables for improved communications in industrial environments. Wire terminations at the node should expose as little un-shielded cable as possible (less than 3.8 cm / 1.5 inches).

Daisy chaining CAN cables between multiple nodes allows leaving down to (20 to 30) cm / (8 to 12) inches of shielded cable between each node, a violation of the standard practice with shielded cable terminal block shield breaks listed below (the shield break is not a stop of the shield. It is reducing the full shield encompassing internal wires to a single wire to pass through or connect to the terminal block). This is acceptable for CAN only at the nodes, as long as the cable from the terminal block closest to the main exit entrance point of the enclosure is at least 1 m / 39 inches long before another terminal block break in the full shielding of the cable wires. The individual shield caps in the nodes add, to provide low impedance shield terminations. Shield brakes not at the node terminal blocks should be minimized and may have additional coupling capacitors to earth as noted below in the general wiring section (if desired, implement with great care).

Chapter 3. Installation

Introduction

This chapter provides the general information for mounting location selection, installation, and wiring of the RTCnet and LINKnet HT distributed I/O node modules. Hardware dimensions, ratings, and requirements are given for mounting and wiring the control in a specific application.

Each type of I/O node is physically similar, only the High Accuracy Thermal couple I/O nodes are different sizes. In addition, each node type has the same power input and CAN cabling options. The two families of Distributed I/O have two differences in CAN: RTCnet has two redundant CAN ports synchronized for real-time communication and LINKnet HT has a single CAN port that is not real time capable.

Basic installation guidance is given within this chapter, but specific requirements are given with each type of distributed I/O node.

Shipping Carton

Before unpacking the I/O nodes, refer to the inside front cover and page vi of this manual for WARNINGS and CAUTIONS. Be careful when unpacking the I/O node. Check for signs of damage such as bent or dented panels, scratches, and loose or broken parts. If any damage is found, immediately notify the shipper.

The node was shipped from the factory in an anti-static foam lined carton. This carton should always be used for transport of the I/O node or for storage when it is not installed in the system.

General Installation

When selecting a location for mounting the I/O nodes, consider the following:

- Protect the unit from direct exposure to water or to a condensation-prone environment.
- The control is designed for installation in a protective metal enclosure, such as a standard cabinet with ingress protection rating of IP54 or greater for hazardous locations.
- Provide an ESD strap or other discharge methods as ESD mitigation inside the cabinet; it must be used for handling the equipment and plugging/unplugging the connectors.
- Provide adequate ventilation for cooling. Mount in a location that is able to maintain an ambient operating temperature within the range of rated maximum and minimum ambient temperatures.
 Shield the unit from radiant heat sources as needed to maintain ambient temperature within the rated range.
- Do not install the unit or its connecting wires near inductive, high-voltage, or high-current devices. If this is not possible, shield both the system connecting wires and the interfering devices and/or its wires
- Allow adequate space around the unit for air flow, servicing, and wiring.
- Do not install where objects can be dropped on the terminals or inside the unit.
- Ground the chassis for proper safety and shielding effectiveness. The DIN Rail connector is
 designed to be the main functional ground for RF. The optional power input ground wire may be, and
 is recommended to be, grounded too if corrosion or significant vibration may be present. A DIN Rail
 mounted grounding terminal block connected to the power port ground pin by as short and large
 gauge wire as possible is recommended.

Mounting Requirements

The nodes are DIN rail mounted, using the DIN Rail as the primary source of chassis ground. The DIN Rail must be connected to EARTH ground as with the enclosure and mounting plate for the DIN rail.

DIN rails must have mounting screws to bolt down and bond to the mounting plate at least every 6–8 inches, (15–20 cm) or ~1–2 inches (~2.5–5 cm) in on each end if the DIN rail is shorter than ~12 inches (30 cm). This provides stability and grounding paths. In addition to the DIN rail grounding, in some environments it is required to add the supplemental ground wire connection from the power port to earth.



The nodes may be mounted in any orientation necessary. However, for best accuracy, the T/C Thermocouple nodes should be mounted in an upright-vertical position.

Nodes should maintain at least 8 cm / 3 inches between them on the long edge and may be flush mounted against each other on the short edge. When using the T/C High Accuracy node, plan for an additional 2 cm / 0.75 inch for the I/O wiring clamp.

Mounting of the units must be such that the Power and CAN cabling are restrained to be directly against the earth grounded metal mounting plate. Since power is not required to be shielded and daisy chained CAN breaks the shield at regular intervals, it is advisable to either segregate power and CAN as possible or shield the power port cabling. The design is expected to have power and CAN be directly restrained to the mounting plate, so they are flush against it for as much length as possible outside the service loop. The service loop should be as short as possible too.

The I/O cabling is intended, but not required, to be segregated from the CAN and Power wiring, this may be accomplished by aligning two rows next to each other and placing the CAN and power bus wiring between them, restrained to the mounting plate in two separate rows, Field I/O cables staying on the outside of the two rows of nodes. This mounting scheme can be repeated to keep field I/O together and away from CAN and Power bus wiring. If not shielded, segregation of DI & DO field wiring is strongly suggested due to switching arc noise on relay contacts and the transient pulse due to relay coil current stored energy.

It is recommended that unshielded and shielded field I/O cabling also be segregated to the extent possible. Specifically, DI & DO cabling should be routed away from other cabling, due to the noise it can generate or couple as noted above.

General Notes:

Terminal blocks are Phoenix MCVR series for all products except High Accuracy T/C Plug Type is side entry, 3.5 mm, latching screw-down for all nodes except High Accuracy T/C.

Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

Voltage / Current Rating: 300 V, 8 A

A small flathead screw-driver (0.4mm wide blade) is required for all terminal blocks.

—Example: Woodward PN 8992-005 (WAGO 210-619, 2.5 mm x 0.4 mm blade)

High Accuracy T/C Node

High Accuracy T/C node channels 1–8 use **fixed** (non-pluggable) 3.5 mm terminal blocks, screw-down <u>for improved cold-junction compensation</u>. The max wire size is 1.3 mm² / 16 AWG for single wires.

Compatibility with Older LINKnet Product Line

The RTCnet / LINKnet HT communication protocol, cabling, and termination design is NOT compatible with the older LINKnet.

RTCnet / LINKnet HT nodes are smaller than the original LINKnet nodes. The length is about 2" (5cm) shorter and the width is about 0.1" less (except for the T/C High Accuracy node which is approx 0.5" wider with the wiring clamp).

RTCnet / LINKnet HT uses smaller 3.5mm pitch connectors than the older 5mm products. RTCnet / LINKnet HT allows a max size single wire of 1.3 mm² / 6 AWG wire. The older product LINKnet terminal blocks (5 mm) allow for a single 2 mm² / 14 AWG wire.



Terminal block wiring must use multi-stranded wires to provide best results. Due to the clamping action of screw-down and spring-loaded terminal blocks, lower voltage level signals like TC and RTD input are susceptible to glitches when using single "solid-core" wires.



<u>Do not</u> tin (solder) the wires that terminate at the node terminal blocks. The spring-loaded CageClamp or screw down terminal blocks are designed to flatten stranded wire, and if those strands are tinned together, the connection loses surface area and is degraded. The solder tinned wire end will also cold flow over time potentially further degrading or break the connection.



CAN NETWORKS. It is possible to disrupt an existing CAN network by attaching an improperly configured device. To prevent problems on your existing network(s), read this chapter before connecting an RTCnet or LINKnet HT Node to a network.

Outline Drawing for Nodes

The physical outline dimensions for RTCnet and LINKnet HT nodes are shown below using a generic RTCnet node drawing. See Woodward reference drawing 9989-1169 for additional details if necessary. **Note:** The T/C High Accuracy node outline drawing is slightly different because of the wiring gland plate and is shown in the next section.

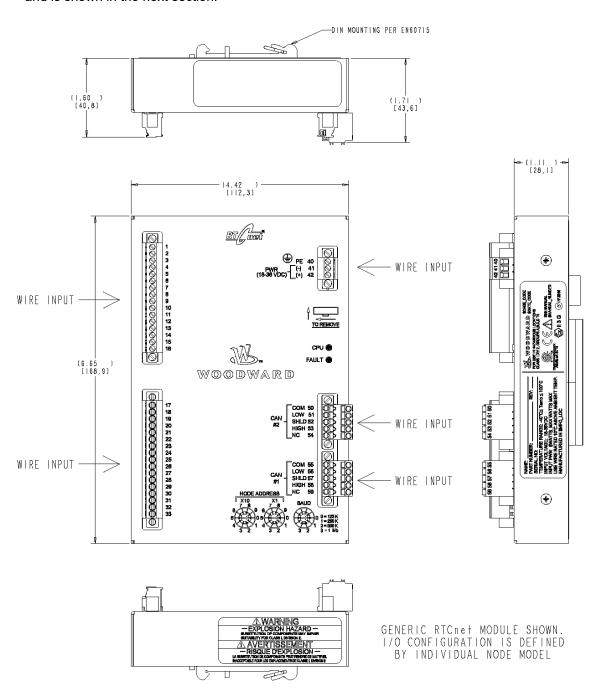
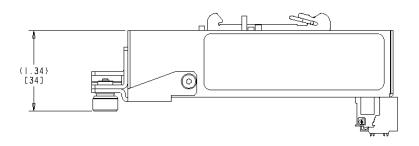


Figure 3-1. RTCnet and LINKnet HT Node Outline Drawing

Outline Drawing for T/C High Accuracy Node

The physical outline dimensions for the T/C High Accuracy node are shown below and is slightly different because of the I/O wiring gland plate. See Woodward reference drawing 9989-1169 for additional details if necessary.



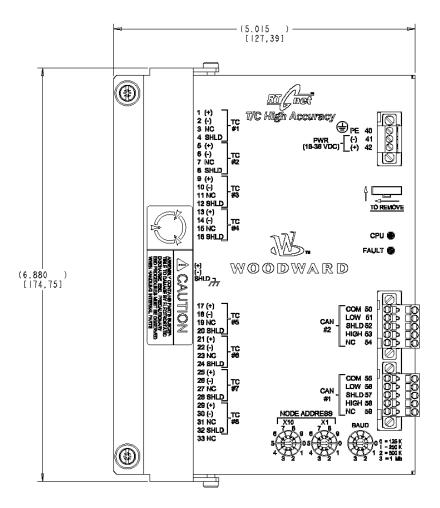


Figure 3-2. T/C High Accuracy Node Outline Drawing

Recommended Grounding Practices

Each type of the I/O nodes must be grounded to earth by the DIN rail. The DIN Rail and mounting plate must be bonded to ground. The DIN Rail connector is designed to be the main functional ground for the units.

The optional power input ground wire may be, and is recommended to be, grounded too if corrosion or significant vibration may be present. A DIN Rail mounted grounding terminal block connected to the power port ground pin by as short and large gage wire as possible is recommended.

Input power ground terminal, not power return, should be wired / bonded to earth ground in applicable cases like environments that lead to corrosion or hazardous atmosphere environments.

General Wiring Guidance

Shielded Wire, Shield Termination Lead Preparation

Where shielded cable is required, cut the cable to the desired length and prepare the cable as instructed below.

- 1. Strip outer insulation from both ends, exposing the braided or spiral wrapped shield. Do not cut the shield or nick the wire inside the shield.
- Using a sharply pointed tool, carefully spread the strands of the braided shield to form a hole.
- 3. Take hold of the inner conductor(s) wire's insulation and pull the wires out of the shield one at a time.
 - a. If the shield is the braided type, twist the braid it to prevent fraying; twist it with the drain wire if one is present. Use as much of the shield braid and drain combined as possible to terminate the shield.
 - b. Foil shields or shields of foil combined with braid require the drain to be brought out and excess foil may be removed.
- 4. Remove 6 mm (1/4 inch) of insulation from the inner insulated signal conductors.
- 5. Connect wiring and shield as shown in plant wiring diagram.
- 6. If a shield connection is not required or desired, fold back and secure or remove the excess shield as needed. If there is a landing/connection point for the shield, it should be used to get optimal signal performance.

General Wiring Installation

All signal lines except power supply, Discrete Input, and Discrete Output wiring should be shielded to prevent picking up stray signals from adjacent equipment. These may also be shielded if desired.

For noise suppression reasons, it is recommended that all low-current and low voltage wires be separated from all high-current and/or high-voltage wiring.

Strain relief is recommended for cables. In general, strain relief of cables is a wise practice.

Input power ground terminal, not power return, should also be wired / bonded to earth ground in applicable cases, such as environments that lead to corrosion or hazardous atmosphere environments.

All shielded cable must be twisted conductor pairs, triples, or multiple pairs. The nodes are designed with AC (Capacitor) and direct shield terminations to earth ground at the cable landing points to facilitate shield termination.

Installations with severe electromagnetic interference (EMI) and maintaining electromagnetic compatibility (EMC) may require additional shielding precautions, such as wire run in conduit or double shielding. In general, the devices are designed with a level of immunity to EMI and to maintain EMC for the typical installation environment and added precautions are not needed. Contact Woodward for more information.

In general, shields are intended to be terminated to their landing point on the RTCnet or LINKnet HT nodes. They may also be required to be landed / terminated at the opposite end.

Shields from the node to its loads or input sources can be directly grounded to earth at both ends, but only if the cable length is sufficiently short to prevent ground loop current in the shield (e.g., shields within a single cabinet or where the shortest straight line distance between shield to chassis/earth connection points is no further than 10 m to 30 m apart).

If long cables are used where termination end point separations are greater than 10 to 30 m, and both shield ends must be terminated, a capacitor must be used at one end to terminate the shield to earth/chassis. The preferred point for the capacitor is at the remote end, but individual device sensitivity makes this a determinative process, to find the end most applicable to using it. Using a 0.01 μ F, 1500 V, capacitor is typically sufficient.

If intervening terminal blocks are used in routing a shielded signal cable, the shield should be continued through the terminal block. If shield grounding is desired at the terminal block, it should be AC (capacitor) coupled to earth. It is suggested to limit the number of TB break points along the cabling between the field device end and node end to a minimum; zero would be best. In general, at least 39 inches (1 m) of cable with an intact shield should present between breaks in the shield. Daisy chained CAN drop cabling are an exception.

Multiple, spread out, direct or high capacitance connections of a shield to earth should be avoided. Multiple connections of shielding run the risk of high levels of low frequency ground current, like 50/60 Hz, flowing within the shield. If there are multiple connections made, add the impedance of them up and make sure it is much greater than safety grounds impedance required by local laws.

Shielding and Enclosure Installations: If the device is installed in a metal enclosure, as expected and intended by hazardous location installations, shielded I/O must be AC or DC terminated directly to the enclosure (earth ground) at the entry to the enclosure, as well as at the intended shield pins on the nodes.

As noted, shield termination can be a deterministic process. AC shield connections (capacitors) on shield I/O may be dictated at the node instead of the direct earth connection provided. Typically, shields at signal inputs are connected directly to earth, and shields at signal outputs are AC-coupled to earth or floating. All shields from the nodes, except CAN are designed directly terminated to earth / chassis. See Woodward application notes 50532, *Interference Control in Electronic Governing Systems*, and 51204, *Grounding and Shield Termination*, for more information.

Specifics are provided in each individual installation section.

Node Replacement / HotSwap



EXPLOSION HAZARD—Do not connect or disconnect while circuit is live unless area is known to be non-hazardous.

Substitution of components may impair suitability for Class I, Division 2 applications.



RISQUE D'EXPLOSION—Ne pas raccorder ni débrancher tant que l'installation est sous tension, sauf en cas l'ambiance est décidément non dangereuse.

La substitution de composants peut rendre ce matériel inacceptable pour les emplacements de Classe I, applications Division 2.



For simplex systems this procedure will SHUTDOWN the control system.



CAN NETWORKS. It is possible to disrupt an existing CAN network by attaching an <u>improperly configured device</u>. To prevent problems on your existing network(s), read this chapter before connecting an RTCnet or LINKnet HT Node to a network.

A faulty RTCnet / LINKnet HT node can be replaced using the following steps.

Configure the New Replacement Node:

• Set the new node address and baud rate to match the faulty node. Remember the node address and use it in GAP to verify that you are initializing the proper module.

Removal of Faulty Node:

- Disconnect the POWER from the faulty node
- Disconnect the CAN1 and/or CAN2 ports from the faulty node
- Disconnect the I/O wiring from the faulty node
- Carefully remove the faulty node from the DIN rail

Installation of New Replacement Node:

- Install the replacement node onto the DIN rail
- Re-connect the I/O wiring from the faulty node
- Re-connect the CAN1 and/or CAN2 ports to the faulty node
- Re-connect the POWER to the faulty node

Node Initialization:

- Use GAP to initialize and reset the node (NODE_INIT). Remember the node address / ID and use it in GAP to verify that you are initializing the proper module.
- Verify the node FAULT led clears properly
- Verify proper GAP operation

Commissioning Checklist

Power Checks

- Verify proper polarity on power connections
- Verify power source and wire size is sufficient for all loads
- Verify input power is 18 V to 36 V (dc) with < 1.5 V (rms) ripple
- Verify PS(+) and PS(–) impedance to EARTH is > 10 MΩ
- Entire power network source resistance should be < 5.4 Ω
- Entire power network source inductance should be < 300 μH

CAN Checks

- Verify CANH is not connected to PS(+), PS(-), EARTH
- Verify CANL is not connected to PS(+), PS(-), EARTH
- Verify CAN_COM is not connected to PS(+), PS(-), EARTH
- Verify CAN shield wire is not shorted to PS(+), PS(-)
- Verify CAN network length is < max length spec for the baud rate being used
- Verify CAN drop cables to each node are as short as possible and meets spec.
- Verify both ends of each CAN network is terminated with 121 Ω between CAN-H and CAN-L wires.
- Verify the CAN network uses 3-wires (CAN-H, CAN-L, and CAN_common) with shielding
- Verify CAN cable is 2008-1512 (Belden YRxxx) or equivalent low capacitance, shielded communications wire.
- Verify the CAN overall cable shield is terminated to EARTH at only (1) location for each network.
 This should be located at the master control (MicroNet) as the cable exits the control cabinet.
- For redundant nodes, verify CAN1 and CAN2 networks are not mis-wired and connected together.

DI, Discrete Input Wiring Checks

- Verify each DI(+) is not shorted to another input.
- Verify each DI(+) is not shorted to CPWR(+), CPWR(-), PS(+), PS(-), EARTH.
- Verify each DI(+) wiring is functional by setting each input HIGH (>16 V DC) and then LOW (<8 V DC). Verify GAP software detects the state change.
- When possible, consider using a shielded DIN cable.

DI, Contact Power (CPWR) Wiring Checks

- CPWR(+) is an output voltage, it should never be connected to any other supply.
- To maintain node isolation, verify CPWR(–) is not shorted to PS(–).
- Using the internal isolated Contact Power output (CPWR,COM) is highly recommended to maintain node-to-node isolation.
- Verify CPWR(+) is not connected to CPWR(-), PS(-), EARTH.
- Verify CPWR(-) is not connected to CPWR(+), PS(+), EARTH.
- Verify CPWR voltage level is correct (18 V to 36 V DC).

DO, Discrete Output Wiring Checks

- Verify each DO(–) is connected to the COIL POWER SOURCE (common) properly.
- Verify each DO(+) output is connected to the COIL LOAD properly.
- Verify each DO(+) is not shorted to another output channel.
- Verify each DO(+) is not shorted to DO(-), PS(+), PS(-), EARTH.
- Functionally verify each DO(+) wiring by driving each output ON then OFF. Verify the GAP software detects the readback state change.
- When possible, consider using a shielded DOUT cable.

TC, Thermocouple Input Wiring Checks

- Verify each TC(+,-) is not shorted to another input channel.
- Verify each TC(+) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each TC(–) terminal is not shorted to PS(+), PS(–), EARTH.
- Verify each TC shield wire is not shorted to PS(+), PS(-).
- Verify no wires are landed accidently on the NC, no-connect terminals.
- Verify each TC shield wire is terminated at the node properly.
- Functionally verify the wiring for each TC channel using a simulator source.
- TC OPENS: A TC input will read MAX DegC if the (+) or (-) wire is broken / open.
- TC SHORTS: A TC input will read 0 DegC if the (+) and (-) wires are shorted.



GROUND FAULTS: Input channels accidently shorted to EARTH will be more susceptible to spurious noise events related to the installation and environment.

RTD, Input Wiring Checks

- Verify each RTD(+,-) is not shorted to another input channel.
- Verify each RTD(+) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each RTD(-) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each RTD(sense) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each RTD(sense) terminal is connected properly for 3-wire sensors.
- Verify each RTD(sense) terminal is jumpered to RTD(–) for 2-wire sensors.
- Verify each RTD shield wire is not shorted to PS(+), PS(-).
- Verify each RTD shield wire is terminated at the node properly.
- Functionally verify the wiring for each RTD channel using a simulator source.
- RTD OPENS: RTD channels will read MAX DegC if the (+) or (-) wire is broken.

Al(non-loop), Analog Input Wiring Checks

- Verify that external XDCR's are NOT used with these self-powered channels.
- Verify each Al(+,-) is not shorted to another input channel.
- Verify each Al(+) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each AI(–) terminal is not shorted to PS(+), PS(–), EARTH.
- Verify each AI shield wire is not shorted to PS(+), PS(-).
- Verify each AI shield wire is terminated at the node properly.
- Functionally verify the wiring for each AI channel using a simulator source.

Al LOOP, Analog Input Wiring Checks

- Verify that external XDCR's are connected to these channels.
- Verify the LPWR voltage level (+22 V DC) is correct for the XDCR.
- If the XDCR needs loop power common, use the LOOP GND terminal.
- Verify each LPWR(+) terminal is wired to the XDCR POWER(+).
- Verify each LPWR(+) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each AI(–) terminal is not shorted to PS(+), PS(–), EARTH.
- Verify each Al shield wire is not shorted to PS(+), PS(-).
- Verify each AI shield wire is terminated at the node properly.
- Verify that all XDCR's for one node use less than 250 mA of LPWR.
- Functionally verify the wiring for each AI channel using a simulator source.

AO, Analog Output Wiring Checks

- Verify each AO(+,-) is not shorted to another output channel.
- Verify each AO(+,-) is not shorted to another Analog Input channel.
- Verify each AO(+) terminal is not shorted to PS(+), PS(-), EARTH.
- Verify each AO(–) terminal is not shorted to PS(+), PS(–), EARTH.
- Verify each AO shield wire is not shorted to PS(+), PS(-).
- Verify each AO shield wire is terminated at the node properly.
- Functionally verify the wiring for each AOUT by driving 4 mA and 20 mA to the load from the GAP application. Verify the RDBK value and correct load current.

Chapter 4. RTD Nodes (8ch)

Description and Features

The RTD node is a CANopen based distributed I/O module that interfaces to either a Woodward RTCnet or LINKnet HT network. RTCnet products are designed for synchronous real-time/deterministic operation whereas LINKnet HT products are designed for slower asynchronous networks.

This module provides (8) channels of I/O monitoring for 100 Ω and 200 Ω resistive temperature devices. Both European (alpha=0.00385) and American (alpha=0.00392) curve types are supported.

Features


- (8) RTD Input Channels, 15 bit resolution
- RTD sensor types (100 Ω , 200 Ω , and ohms)
- RTD curves (European alpha 0.003850, American alpha 0.003920)
- High accuracy with automatic temperature compensation
- High temperature/reliability design for 100 °C environments
- High vibration design suitable for industrial turbine/engine skid-mounting
- Designed for operation with MicroNet Plus and redundant CPU failover
- Woodward GAP block, diagnostics, and configuration support
- 3-way isolated design separating power, communications, and inputs

CAN Communications (isolated)

- Baud rate configuration for 1 Mbit, 500 Kbit, 250 Kbit, and 125 Kbit
- RTCnet supported GAP update rates of 20 ms, 40 ms, 80 ms, 160 ms
- LINKnet HT supported GAP update rates of 100 ms, 200 ms, etc (up to 1 second)

RTCnet, Real-Time

(2 isolated CAN ports)

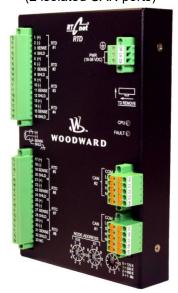

LINKnet HT, Non Real-Time

(1 isolated CAN port)

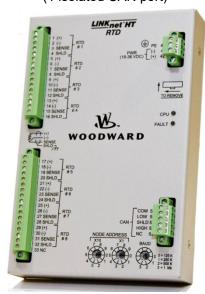


Figure 4-1. RTD RTCnet and RTD LINKnet HT

Block Diagram

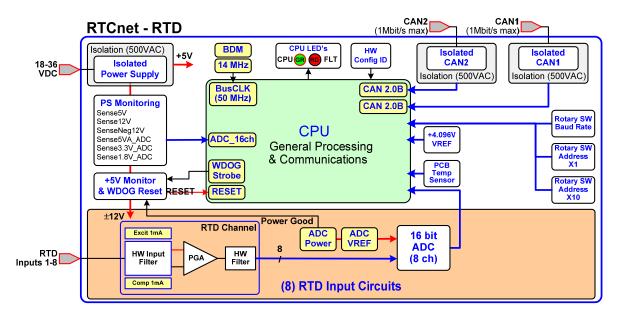


Figure 4-2. RTCnet RTD Block Diagram

Specifications

Environment

Operating Temperature	−40 °C to +100 °C
Storago Tomporaturo	-40 °C to +105 °C, recommend 20 °C to 40 °C for
Storage Temperature	long life
Vibration	8.2 Grms, skid mount, per Woodward RV1
Shock	40 G, 3x each axis, per Woodward MS1
Ingress Rating / Installation	IP20, Pollution Degree 2, Overvoltage Category 3
EMC Emissions	EN 61000-6-4 (Heavy Industrial)
EIVIC EITIISSIOTIS	IACS UR E10 (Commercial Marine)
EMC Increase in the	EN 61000-6-2 (Heavy Industrial)
EMC Immunity	IACS UR E10 (Commercial Marine)

Input Power

Input Power (watts)	5.0 W max
Input Voltage (DC)	(18 to 36) V (dc)
Input Voltage (AC ripple)	< 1.5 V (ac), 50 Hz to 1 kHz
Input location	500 V (ac) to chassis, CAN1, CAN2, and I/O
Input Isolation	channels
Overvoltage Protection	±60 V (dc), includes reverse polarity protection
Wire size (to node)	0.5 mm ² / 20 AWG for two wires
Wife Size (to flode)	1.3 mm ² / 16 AWG max for single wires
Wire size (main distribution)	< 300 m, 3 mm ² / 12 AWG or larger
Wiring & Source Impedance	< 5.4 Ω, 300 μH max

Functional

Number of channels	8	
Input Range	(0 to 600) Ω	
Input RTD Type	100 Ω, 200 Ω (2 & 3 wire, European & American curves)	
Engineering Units	°C, °F, or ohms (default = °C)	
Channel Isolation	0 V channel to channel	
Gridinici isolation	500 V (ac) to chassis, input power, CAN1, and CAN2	
RTD Excitation Current	1 mA	
Hardware filter	2 poles @ ~10 ms	
Accuracy Signal Range	-100 °C to upper curve limit	
Accuracy (-40 °C, +100 °C)	±2 °C	
High Accuracy(-20,+80 °C)	±1.1 °C for signals between –100 °C and 150 °C	
Resolution	< 0.1 °C (~15 bits)	
CMRR over temp	> 110 dB @ 50/60 Hz, 140 dB typical	
CMVR	±10 V (dc) to dgnd	
Internal Temp Sensor	±1.0 °C typical (value available thru CANbus)	
Miswire protection	reverse polarity, short-circuit to earth / each other	
Over-voltage protection	± 36 V (dc)	

NOTICE

Some degraded performance may occur on RTD inputs in the presence of energy from transmitters such as cell phones or push to talk (PTT) radios. The units described herein are designed to have a typical level of protection from interference in the environment without degradation; however, not all situations can be anticipated. Degraded performance, if present, will be in the form of a change in the accuracy of the measured temperature. It is recommended that operation of such devices be kept more than 1 meter (3 ft) from the RTCnet or LINKnet HT to prevent any possible degradation.

NOTICE

Intentional or unintentional grounding, also called "EARTHING", of the RTD sensor may reduce the accuracy of the inputs due to ground loop noise flowing in the wiring. In general, common mode noise riding on the earth ground will degrade performance, depending on the noise present, up to damaging them. EARTHING, intentional or unintentional, provides a path for transients (ground bounce transient currents) or RF noise to flow through the input, either from or to the remote earthing connection. The RTD and TC inputs are designed to survive a limited level of transient noise with intentional or unintentional grounding, or EARTHING, of the inputs. This is limited to transient pulses, as defined in the surge specification IEC 61000-4-5, of ±1 kV with respect to the remote ground injected into the local chassis ground.

NOTICE

If the RTD sensor grounding is intentionally used, maintaining short RTD cable lengths is recommended; this will aid in reducing the effect of ground loop noise and limit the transient voltage potential that may be developed. The recommended distance is less than 10 up to 30 m separation, for furthest two separated points in the subsystem. Placing one set of earthed sensors at 30 m from the node and another set of earthed sensors 30 m in the opposite direction is an example violation. That is, the shortest straight line distance between the grounded sensors is 60 m is a violation of this recommendation.

Determining acceptability of deviations due to ground noise is deterministic. Earth noise due to large currents or voltages may be present, depending on the location in the system.

Determining acceptability of transient noise may be due to indirect lightning strikes and is determined by the level of building structure that is provided for shelter and continuity (conductivity) of the earthing system, voltage peak = Current peak * ground resistance. In the case of a motor transient the peak current may be a few hundred amps, in the case of lightening transients this may be up to $\sim 200,000$ amps. With a ± 1000 V limited design and a 200 kA transient, the earth ground impedance must be less than 5 milliohms.

NOTICE

Mixing of earth grounded and non-earth grounded RTD or TC sensors in the same node will degrade the performance of all sensor inputs; however, length limitations only apply to the straight line distances from the grounded sensors to the nodes or to each other, whichever is further.

NOTICE

Channel to channel isolation is limited, unused inputs should be shorted at the node terminal blocks to provide known values and limit spurious noise from coupling to the unused inputs and propagating.

RTD Curve Limits

RTD Range Limits (Ω and °C)

RTD Type	SpecLohms	Specuohms	SpecLDegC	SpecuDegC
100 Ω, E	18.49	390.48	-200	850
100 Ω, A	17.00	396.30	-200	850
200 Ω, E	37.04	594.97	-200	550
200 Ω, Α	33.992	602.81	-200	550

RTD Curve Types

European curve (100 EU, 200 EU)	American curve (100 US, 200 US)
per IEC 60751 spec	per ITS-90 update
R0 =100 Ω or 200 Ω platinum	R0 =100 Ω or 200 Ω platinum
coeff_A=3.9083E-3, coeff_B=-5.775E-7	coeff_A=3.9848E-3, coeff_B=-5.8700E-7
coeff_C=-4.183E-12	coeff_C=-4.0000E-12
resulting ALPHA coefficient is 0.003850	resulting ALPHA coefficient is 0.003920

Configuration

Rotary switches are provided to configure the **Network Address** and **Baud Rate** (125K, 250K, 500K, 1 Mbit). The **Network Address** (Node ID) is configurable from 1-99 using the x10 and x1 rotary switches. For example, to configure node 29 address set x10=2 and x1=9.

Software Configuration: Woodward's GAP application is a block language programmer tool that provides specific blocks for each node type. GAP blocks exist to configure and monitor the node channels, update rates, and faults.

Connector Pinouts

Input Power

Power is provided through a 3 position, latching terminal block with removable plug.

Table 4-1. Input Power Connector Pinout

Board Connection	PIN	Color	Description
+++	1	EARTH	Optional earth / shield connection
	2	BLACK	Input Power (–)
1	3	RED	Input Power (+)
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			

CAN Port(s)

Every RTCnet/LINKnet HT node provides a CAN1 communication port (5-position, latching) for network communications. Removable mating plug(s) are provided for field wiring.

Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

RTCnet, real-time nodes provide an additional CAN2 connection for those systems that require redundant network wiring. The redundant CPU's in a MicroNet Plus Control will control both ports properly during CPU failover events.

Table 4-2. CAN Connector Pinout

Board Connection	PIN	Color	lor Description	
	1	BLACK	CAN Signal Ground	
* * * * * *	2	BLUE	CAN Low	
	3	Shield	CAN Shield (30 Meg + AC coupled to EARTH)	
1 Commence of the	4	WHITE	CAN High	
	5	n/a	Not used, no internal connection	
Divis Type: Cide entry 2.5 mm, 9.4 pluggeble with letching serow down				

Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

CAN networks must include a 120 Ω termination resistor at each end of the trunk line. It is recommended to design the network trunk to be less than 100 meters with a max cumulative drop length of less than 39 meters. Drop cables connecting a device to the trunk line should be as short as possible and much less than 6 meters. For 1 Mbit/s communication each drop cable must be less than 1 meter.

Field Wiring and Diagrams

General Wiring Recommendations

- RTD Inputs: Use 0.5 mm² / 20 AWG, 3-wire, shielded twisted pair cable (<300 m)
- Power: Use 0.5 mm² / 20 AWG, 2-wire cable. Limit daisy chains to 16 nodes
- CAN: Use Belden YR58684, 0.3 mm² / 22 AWG, 3-wire comms cable (2008-1512)
- **CAN Terminations**: Use 120 Ω ± 10 Ω at each end of the network
- CAN Stub Lengths: Short as possible (< 1 meter is best)
- Shielding: All CAN and I/O signals must be shielded for best performance
- **EARTH Connections**: The DIN-rail clip is the primary earth connection. The PE connection should be used when required for harsh environments where the DIN-rail ground may be compromised over time.

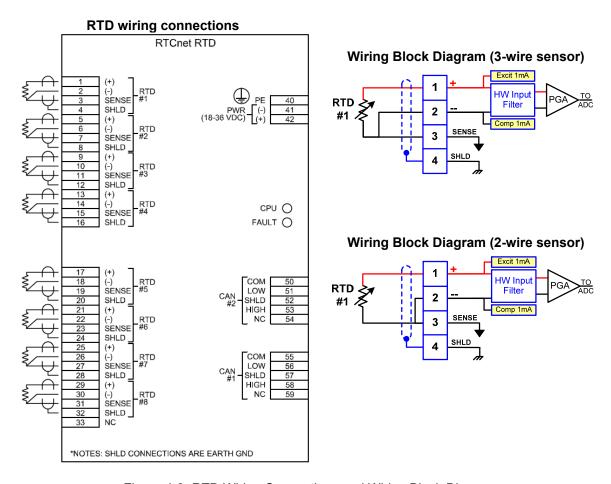


Figure 4-3. RTD Wiring Connections and Wiring Block Diagram

Status Indicators and Trouble Codes

Each node displays a green CPU LED and a red FAULT LED to help in troubleshooting if the module has a problem.

CPU (green): This indicates the CPU has power and is capable of running. It also indicates that the firmware is correct for the board. For long term reliability reasons, this LED is dimmer at high temperatures and turned OFF for high temperature, out of spec conditions.

FAULT (red): A solid red LED indicates that the node has not been initialized by the Network Master. A flashing red LED indicates a CAN communication fault or hardware problem. A table of fault LED flash-codes is shown below:

Table 4-3. RTD Fault/Status Indicators

RTD Fault / Status	FlashCode
The Node is not initialized or is in a pre-operational state	Solid Red
CAN - CORE_SYNC_ERR	1,1
CAN - COMMUNICATION_CAN_ALL_ERR	1,2
CAN1 - COMMUNICATION TX ERROR	1,3
CAN1 - COMMUNICATION RX ERROR	1,4
CAN1 - COMMUNICATION BUS OFF ERROR	1,5
CAN1 - COMMUNICATION_WARNING_LIMIT_REACHED ERROR	1,6
CAN1 - CORE_TIMESTAMP_VALUE_ERR	1,7
CAN - COMMUNICATION_BAUD_RATE_ERR	2,1
CAN2 -COMMUNICATION_NODE_ID_ERR	2,2
CAN2 -COMMUNICATION TX ERROR	2,3
CAN2 -COMMUNICATION RX ERROR	2,4
CAN2 -COMMUNICATION BUS OFF ERROR	2,5
CAN2 -COMMUNICATION_WARNING_LIMIT_REACHED_ERROR	2,6
APP_CHANNELO_SENSOR_LOW_LIMIT_ERR	4,01
APP_CHANNEL1_SENSOR_LOW_LIMIT_ERR	4,02
APP_CHANNEL2_SENSOR_LOW_LIMIT_ERR	4,03
APP_CHANNEL3_SENSOR_LOW_LIMIT_ERR	4,04
APP_CHANNEL4_SENSOR_LOW_LIMIT_ERR	4,05
APP_CHANNEL5_SENSOR_LOW_LIMIT_ERR	4,06
APP_CHANNEL6_SENSOR_LOW_LIMIT_ERR	4,07
APP_CHANNEL7_SENSOR_LOW_LIMIT_ERR	4,08
APP_CHANNELO_SENSOR_HIGH_LIMIT_ERR	4,09
APP_CHANNEL1_SENSOR_HIGH_LIMIT_ERR	4,10
APP_CHANNEL2_SENSOR_HIGH_LIMIT_ERR	4,11
APP_CHANNEL3_SENSOR_HIGH_LIMIT_ERR	4,12
APP_CHANNEL4_SENSOR_HIGH_LIMIT_ERR	4,13
APP_CHANNEL5_SENSOR_HIGH_LIMIT_ERR	4,14
APP_CHANNEL6_SENSOR_HIGH_LIMIT_ERR	4,15
APP_CHANNEL7_SENSOR_HIGH_LIMIT_ERR	4,16

RTCnet / LINKnet HT Nodes

CORE_EEPROM_WRITE_ERR	8,01
CORE_EEPROM_READ_ERR	8,02
CORE_PARAMETER_ERR	8,03
CORE_PARAMETER_VERSION_ERR	8,04
CORE_STACK_OVERFLOW_WARNING_ERR	8,05
CORE_SENCE_5V_RANGE_ERR	8,06
CORE_SENCE_12V_RANGE_ERR	8,07
CORE_SENCE_m12V_RANGE_ERR	8,08
CORE_SENCE_5VA_RANGE_ERR	8,09
CORE_SENCE_3p3V_RANGE_ERR	8,10
CORE_SENCE_1p8V_RANGE_ERR	8,11
CORE_INTERNAL_ADC_ERR	9,1
CORE_LOW_VOLTAGE_RESET_ERR	9,2
APP_EXTERNAL_ADC_ERR	9,9

Chapter 5. Thermocouple Nodes (8ch)

Description and Features

The T/C (thermocouple) node is a CANopen based distributed I/O module that interfaces to either a Woodward RTCnet or LINKnet HT network. RTCnet products are designed for synchronous real-time/deterministic operation whereas LINKnet HT products are designed for slower asynchronous networks.

This module provides (8) channels of I/O monitoring for many different thermocouple types. Automatic temperature drift and cold-junction compensation is standard. **RTCnet**, **T/C High Accuracy** nodes provide automatic cold-junction compensation using (8) different sensors (one for each channel). **LINKnet HT** T/C nodes provide automatic cold-junction compensation using (2) sensors.

Features

- (8) T/C Input Channels, 15 bit resolution, fail high
- T/C sensor types (K, J, T, B, E, N, R, S, and mV)
- High accuracy with automatic cold-junction and temperature compensation
- High temperature/reliability design for 100 °C environments
- High vibration design suitable for industrial turbine/engine skid-mounting
- Designed for operation with MicroNet Plus and redundant CPU failover
- Woodward GAP block, diagnostics, and configuration support
- 3-way isolated design separating power, communications, and inputs

CAN Communications (isolated)

- Baud rate configuration for 1 Mbit, 500 Kbit, 250 Kbit, and 125 Kbit
- RTCnet supported GAP update rates of 20 ms, 40 ms, 80 ms, 160 ms
- LINKnet HT supported GAP update rates of 100 ms, 200 ms, etc (up to 1 second)

RTCnet, Real-Time, High Accuracy

(2 isolated CAN ports, fixed TB)



LINKnet HT, Non Real-Time

(1 isolated CAN port, pluggable)

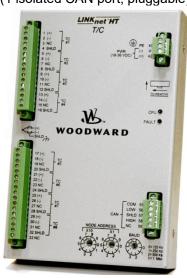


Figure 5-1. TC RTCnet and TC LINKnet HT

Block Diagram

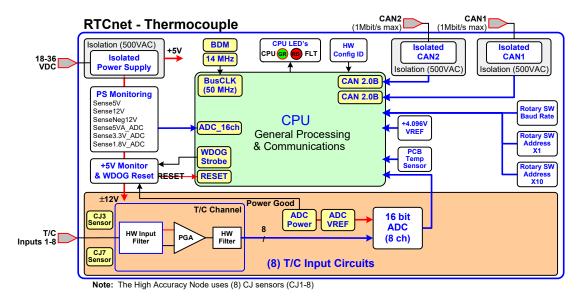


Figure 5-2. RTCnet Thermocouple Block Diagram

Specifications

Environment

Operating Temperature	−40 °C to +100 °C
Ctorono Torono anatuma	-40 °C to +105 °C, recommend 20 °C to 40 °C for
Storage Temperature	long life
Vibration	8.2 Grms, skid mount, per Woodward RV1
Shock	40 G, 3x each axis, per Woodward MS1
Ingress Rating / Installation	IP20, Pollution Degree 2, Overvoltage Category 3
FMC Emissions	EN 61000-6-4 (Heavy Industrial)
EMC Emissions	IACS UR E10 (Commercial Marine)
EMC Immunity	EN 61000-6-2 (Heavy Industrial)
EMC Immunity	IACS UR E10 (Commercial Marine)

Input Power

Input Power (watts)	4.3 W max
Input Voltage (DC)	(18 to 36) V (dc)
Input Voltage (AC ripple)	< 1.5 V (ac), 50 Hz to 1 kHz
Input Isolation	500 V (ac) to chassis, CAN1, CAN2, and I/O
Input isolation	channels
Overvoltage Protection	±60 V (dc), includes reverse polarity protection
Wire size (to node)	0.5 mm ² / 20 AWG for two wires, 1.3 mm ² / 16 AWG
ville size (to flode)	max for single wires
Wire size (main distribution)	< 300 m, 3 mm ² / 12 AWG or larger
Wiring & Source Impedance	< 5.4 Ω, 300 μH max

Functional

Number of channels	8
Input T/C Types	K, J, T, B, E, N, R, S, and mV
input 1/C Types	(per NIST Monograph 175, ITS-90)
Engineering Units	°C, °F, or ohms (default = °C)
Channel Isolation	0 V channel to channel
Charmer isolation	500 V (ac) to chassis, input power, CAN1, and CAN2
Accuracy (-40, +100 °C)	See tables below
Resolution	< 0.1 °C (~15 bits)
Hardware Filter	2 poles @ ~10 ms
CMRR over temp	> 110 dB @ 50/60 Hz, 140 dB typical
CMVR	±10 V (dc) to DGND, ±110 V (dc) to earth
Internal Temp Sensor	±1.0 °C typical (available thru CANbus)
Miswire protection	reverse polarity, short-circuit to earth / each other
Over-voltage protection	±36 V (dc)
Cold Junction	Automatic CJ compensation included

High Accuracy Thermocouple Module Accuracy

<u> </u>	<u> </u>
High Accuracy Signal Range	+200 °C to 900 °C
Accuracy (-20 °C, +80 °C)	± 1.5 °C with CJ (types K, J, N, E, T)
Accuracy (-20 °C, +80 °C)	± 3.0 °C with CJ (types R, S, B) and B type > 500 °C
CJ Sensors	Each channel has a dedicated CJ sensor

^{*}Use Standard T/C specs when outside of High Accuracy Signal Range & Temperature

Standard Thermocouple Module Accuracy

Accuracy Signal Range	-100 °C to upper curve limit +500 °C to upper curve limit (type B)
Accuracy (-40 °C, +100 °C)	±3.5 °C with CJ, mounted vertically-upright (±5.2 °C when inverted)
CJ Sensor (ch 1–4)	Channels 1–4 share a cold junction sensor (located at CJ3)
CJ Sensor (ch 5–8)	Channels 5–8 share a cold junction sensor (located at CJ7)

Thermocouple Curve Limits

Thermocouple Range Limits (mV, °C)

T/C Type	Spec _{LMV}	Specumv	Spec _{LDegC}	SpecuDegC
Type K	-6.458	54.886	-270	1372
Type N	-4.345	47.513	-270	1300
Type E	-9.835	76.373	-270	1000
Type J	-8.095	69.553	-210	1200
Type T	-6.258	20.872	-270	400
Type R	-0.226	21.101	– 50	1768
Type S	-0.236	18.693	– 50	1768
Type B	0.033	13.82	100	1820

Configuration

Rotary switches are provided to configure the **Network Address** and **Baud Rate** (125K, 250K, 500K, 1 Mbit). The **Network Address** (Node ID) is configurable from 1-99 using the x10 and x1 rotary switches. For example, to configure node 29 address set x10=2 and x1=9.

Software Configuration: Woodward's GAP application is a block language programmer tool that provides specific blocks for each node type. GAP blocks exist to configure and monitor the node channels, update rates, and faults.

Connector Pinouts

Input Power

Power is provided through a 3-position, latching terminal block with removable plug.

Table 5-1. Input Power Connector Pinout

Board Connection	PIN	Color	Description
+++	1	EARTH	Optional earth / shield connection
	2	BLACK	Input Power (–)
	3	RED	Input Power (+)
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			
Max wire size: 1.3 mm ² / 16 AWG for single wires, 0.5 mm ² / 20 AWG for two wires			

CAN Port(s)

Every RTCnet/LINKnet HT node provides a CAN1 communication port (5-position, latching) for network communications. Removable mating plug(s) are provided for field wiring.

RTCnet, real-time nodes provide an additional CAN2 connection for those systems that require redundant network wiring. The redundant CPU's in a MicroNet Plus Control will control both ports properly during CPU failover events.

Table 5-2. CAN Connector Pinout

Board Connection	PIN	Color	Description
	1	BLACK	CAN Signal Ground
++++	2	BLUE	CAN Low
	3	Shield	CAN Shield (30 Meg + AC coupled to EARTH)
A Transmission	4	WHITE	CAN High
	5	n/a	Not used, no internal connection
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			

Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

CAN networks must include a 120 Ω termination resistor at each end of the trunk line. It is recommended to design the network trunk to be less than 100 meters with a max cumulative drop length of less than 39 meters. Drop cables connecting a device to the trunk line should be as short as possible and much less than 6 meters. For 1 Mbit/sec communication each drop cable must be less than 1 meter.

Field Wiring and Diagrams

General Wiring Recommendations

- **T/C Inputs for standard nodes**: Use (0.5 to 1.3) mm² / (16 to 20) AWG, 2-wire, shielded twisted pair cable (<300 m)
- T/C Inputs for high accuracy nodes: Use (0.8 to 0.13) mm² / (18 to 26) AWG, 2-wire, shielded twisted pair cable (<300 m). Use (1.3 to 0.13) mm² / (16 to 26) AWG solid
- Power: Use 0.5 mm² / 20 AWG, 2-wire cable. Limit daisy chains to 16 nodes
- CAN: Use Belden YR58684, 0.3 mm² / 22 AWG, 3-wire comms cable (2008-1512)
- **CAN Terminations**: Use 120 Ω ± 10 Ω at each end of the network
- CAN Stub Lengths: Short as possible (< 1 m is best)
- Shielding: All CAN and I/O signals must be shielded for best performance
- **EARTH Connections**: The DIN-rail clip is the primary earth connection. The PE connection should be used when required for harsh environments where the DIN-rail ground may be compromised over time.

Thermocouple Connections RTCnet T/C HIGH ACCURACY SHLD (+) (-) SHLD (+)NC SHLD CPU () FAULT () (-) NC LOW SHLD (+) (-) HIGH SHID (+) (-) NC LOW SHLD SHLD HIGH (-) NC NC SHLD *NOTES: SHLD CONNECTIONS ARE EARTH GND

Wiring Block Diagram




Figure 5-3. Thermocouple Connections and Wiring Block Diagram

Status Indicators and Trouble Codes

Each node displays a green CPU LED and a red FAULT LED to help in troubleshooting if the module has a problem.

CPU (green): This indicates the CPU has power and is capable of running. It also indicates that the firmware is correct for the board. For long term reliability reasons, this LED is dimmer at high temperatures and turned OFF for high temperature, out of spec conditions.

FAULT (red): A solid red LED indicates that the node has not been initialized by the Network Master. A flashing red LED indicates a CAN communication fault or hardware problem. A table of fault LED flash-codes is shown below:

Table 5-3. TC Fault/Status Indicators

TC Fault / Status	FlashCode
The Node is not initialized or is in a pre-operational state	Solid Red
CAN - CORE_SYNC_ERR	1,1
CAN - COMMUNICATION_CAN_ALL_ERR	1,2
CAN1 - COMMUNICATION TX ERROR	1,3
CAN1 - COMMUNICATION RX ERROR	1,4
CAN1 - COMMUNICATION BUS OFF ERROR	1,5
CAN1 - COMMUNICATION_WARNING_LIMIT_REACHED ERROR	1,6
CAN1 - CORE_TIMESTAMP_VALUE_ERR	1,7
CAN - COMMUNICATION_BAUD_RATE_ERR	2,1
CAN2 - COMMUNICATION_NODE_ID_ERR	2,2
CAN2 - COMMUNICATION TX ERROR	2,3
CAN2- COMMUNICATION RX ERROR	2,4
CAN2 - COMMUNICATION BUS OFF ERROR	2,5
CAN 2- COMMUNICATION_WARNING_LIMIT_REACHED_ERROR	2,6
APP_CHANNELO_SENSOR_LOW_LIMIT_ERR	4,01
APP_CHANNEL1_SENSOR_LOW_LIMIT_ERR	4,02
APP_CHANNEL2_SENSOR_LOW_LIMIT_ERR	4,03
APP_CHANNEL3_SENSOR_LOW_LIMIT_ERR	4,04
APP_CHANNEL4_SENSOR_LOW_LIMIT_ERR	4,05
APP_CHANNEL5_SENSOR_LOW_LIMIT_ERR	4,06
APP_CHANNEL6_SENSOR_LOW_LIMIT_ERR	4,07
APP_CHANNEL7_SENSOR_LOW_LIMIT_ERR	4,08
APP_CHANNELO_SENSOR_HIGH_LIMIT_ERR	4,09
APP_CHANNEL1_SENSOR_HIGH_LIMIT_ERR	4,10
APP_CHANNEL2_SENSOR_HIGH_LIMIT_ERR	4,11
APP_CHANNEL3_SENSOR_HIGH_LIMIT_ERR	4,12
APP_CHANNEL4_SENSOR_HIGH_LIMIT_ERR	4,13
APP_CHANNEL5_SENSOR_HIGH_LIMIT_ERR	4,14
APP_CHANNEL6_SENSOR_HIGH_LIMIT_ERR	4,15
APP_CHANNEL7_SENSOR_HIGH_LIMIT_ERR	4,16

RTCnet / LINKnet HT Nodes

CORE_EEPROM_WRITE_ERR	8,01
CORE_EEPROM_READ_ERR	8,02
CORE_PARAMETER_ERR	8,03
CORE_PARAMETER_VERSION_ERR	8,04
CORE_STACK_OVERFLOW_WARNING_ERR	8,05
CORE_SENSE_5V_RANGE_ERR	8,06
CORE_SENSE_12V_RANGE_ERR	8,07
CORE_SENSE_m12V_RANGE_ERR	8,08
CORE_SENSE_5VA_RANGE_ERR	8,09
CORE_SENSE_3p3V_RANGE_ERR	8,10
CORE_SENSE_1p8V_RANGE_ERR	8,11
CORE_INTERNAL_ADC_ERR	9,1
CORE_LOW_VOLTAGE_RESET_ERR	9,2
APP_EXTERNAL_ADC_ERR	9,9

Chapter 6. AIO 4–20 mA Nodes (8in, 2out)

Description and Features

The AIO and AIO LOOP powered nodes are CANopen based distributed I/O modules that interface to either a Woodward RTCnet or LINKnet HT network. RTCnet products are designed for synchronous real-time/deterministic operation, whereas LINKnet HT products are designed for slower asynchronous networks.

These modules provide (8) 4–20 mA input channels of I/O monitoring and (2) 4–20 mA output channels for I/O control. The input and output channel groups are isolated from each other. An isolated Loop Power supply for the analog inputs is provided as +22 V (dc) and includes short-circuit/over-voltage protection.

The AIO node provides self-powered input channels, and the AIO LOOP node provides loop powered input channels.

Features

- (8) 4–20 mA Analog Input Channels, 14 bit resolution
- (2) 4–20 mA Analog Output Channels, 12 bit resolution
- Loop Power +22 V is provided with short-circuit and over-voltage protection
- Al channel 6 is designed as a fast channel for special control functions
- Al channels 7/8 are self-power inputs that can be configured for loop power
- High temperature/reliability design for 100 °C environments
- High vibration design suitable for industrial turbine/engine skid-mounting
- Designed for operation with MicroNet Plus and redundant CPU failover
- Woodward GAP block, diagnostics, and configuration support
- 4-way isolated design separating power, communications, inputs, and outputs

CAN Communications (isolated)

- Baud rate configuration for 1 Mbit, 500 Kbit, 250 Kbit, and 125 Kbit
- RTCnet supported GAP update rates of 10 ms. 20 ms. 40 ms. 80 ms. 160 ms
- LINKnet HT supported GAP update rates of 100 ms, 200 ms, etc (up to 1 second)

RTCnet, Real-Time (2 isolated CAN ports)



LINKnet-HT, Non Real-Time

(1 isolated CAN port)

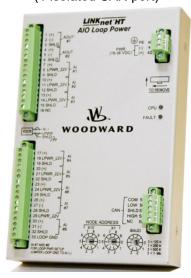


Figure. 6-1. AIO Loop Power RTCnet and LINKnet-HT

Block Diagram

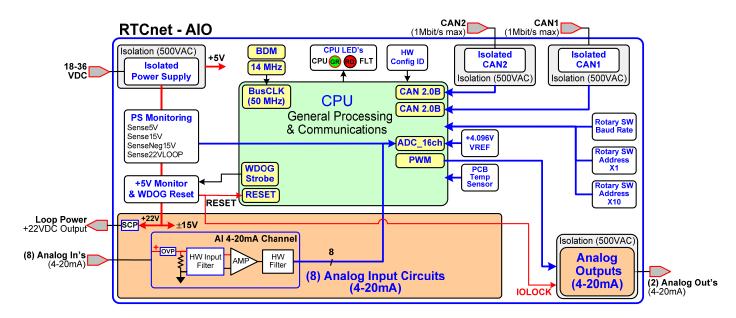


Figure 6-2. RTCnet AIO Block Diagram

Specifications

Environment

Operating Temperature	-40 °C to +100 °C
Ctana na Tanana nationa	-40 °C to +105 °C, recommend 20 °C to 40 °C for
Storage Temperature	long life
Vibration	8.2 Grms, skid mount, per Woodward RV1
Shock	40 G, 3x each axis, per Woodward MS1
Ingress Rating / Installation	IP20, Pollution Degree 2, Overvoltage Category 3
EMC Emissions	EN 61000-6-4 (Heavy Industrial)
	IACS UR E10 (Commercial Marine)
EMC Immunity	EN 61000-6-2 (Heavy Industrial)
	IACS UR E10 (Commercial Marine)

Input Power

Input Power (watts)	5.6 W max (no loop power) 12.1 W max (with loop power=250 mA)
Input Voltage (DC)	(18 to 36) V (dc)
Input Voltage (AC ripple)	< 1.5 V (ac), 50 Hz to 1 kHz
Input Isolation	500 V (ac) to chassis, CAN1, CAN2, and I/O channels
Overvoltage Protection	±60 V (dc), includes reverse polarity protection
Wire size (to node)	0.5 mm² / 20 AWG for two wires, 1.3 mm² / 16 AWG max for single wires
Wire size (main distribution)	< 300 m, 3 mm ² / 12 AWG or larger
Wiring & Source Impedance	< 5.4 Ω, 300 μH max

Specifications (AI)

Number of channels	8		
Al Input Range	(0 to 24) mA		
Al Input Isolation	0 V channel to channel.		
Al Input isolation	500 V (ac) to PS Input, CAN1, CAN2, AO circuits, EARTH		
Al Accuracy (@ 25 °C)	≤ 0.03 mA or 50 mV in voltage mode		
Al Accuracy (–40, +100 °C)	≤ 0.12 mA or 100 mV in voltage mode		
Al High Accuracy (–20, +80 °C)	≤ 0.0325 mA		
Al Resolution	14 bits of full scale (FS=24 mA)		
Al Hardware filter	2 poles @ ~10 ms		
Al Haldwale IIItel	**Fast channel (ch 6) has 2 poles @ ~5 ms		
Al Input Impedance	~160 ς		
Al Loop power output	22 V ±12 %, (0 to 250) mA, short circuit & diode protected		
Al Loop power Isolation	500 V (ac) to PS Input, CAN1, CAN2, AO circuits, EARTH		
AI CMRR over temp	> 70 dB @ 50/60 Hz (typical 86 db)		
AI CMVR	50 V (dc) (amplifier capable to 200 V [dc])		
Al Overvoltage	±36 V (dc) continuous at room temperature		
Internal Temp Sensor	±1.0 °C typical (available thru CANbus)		
Miswire protection (AI)	reverse polarity, short-circuit to earth / each other		
Miswire protection (LPWR)	reverse polarity, short-circuit to earth / each other		

Specifications (AO)

	-		
Number of channels	2 (each with readback)		
AO Output Range	(2 to 24) mA, 0 mA during shutdown		
A	0 V channel to channel		
AO Output Isolation	500 V (ac) to PS Input, CAN1, CAN2, Al circuits, EARTH		
AO Accuracy (@ 25 °C)	≤ 0.05 mA		
AO Accuracy (-40, +100 °C)	≤ 0.12 mA		
AO High Accuracy (-20, +80 °C)	≤ 0.05 mA		
AO Resolution	12 bits of full scale (FS=24 mA)		
AO Load Capability	400 ς at 20 mA		
AO Hardware filter (max)	3 poles @ 160 μs		
AO Output Readback	(0 to 24) mA		
AO Readback Accuracy	< 5 % over full temperature range		
AO Readback HW Filter	1.1 ms nominal		
IOLOCK state	DOUT circuits are de-energized during power-up, power-		
	down, voltage failures (5 V), and watchdog failures		
Miswire protection	reverse polarity, short-circuit to earth / each other		
Over-voltage protection	Overvoltage to 36 V (dc)		

Configuration

Rotary switches are provided to configure the **Network Address** and **Baud Rate** (125K, 250K, 500K, 1 Mbit).

The **Network Address** (Node ID) is configurable from 1-99 using the x10 and x1 rotary switches. For example, to configure node 29 address set x10=2 and x1=9.

Software Configuration: Woodward's GAP application is a block language programmer tool that provides specific blocks for each node type. GAP blocks exist to configure and monitor the node channels, update rates, and faults.

Connector Pinouts

Input Power

Power is provided through a 3 position, latching terminal block with removable plug.

Table 6-1. Input Power Connector Pinout

Board Connection	PIN	Color	Description
+++	1	EARTH	Optional earth / shield connection
	2	BLACK	Input Power (–)
	3	RED	Input Power (+)
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			

Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

CAN Port(s)

Every RTCnet/LINKnet HT node provides a CAN1 communication port (5 position, latching) for network communications. Removable mating plug(s) are provided for field wiring.

RTCnet, real-time nodes provide an additional CAN2 connection for those systems that require redundant network wiring. The redundant CPU's in a MicroNet Plus Control will control both ports properly during CPU failover events.

Table 6-2. CAN Connector Pinout

Board Connection	PIN	Color	Description
	1	BLACK	CAN Signal Ground
+++++	2	BLUE	CAN Low
	3	Shield	CAN Shield (30 Meg + AC coupled to EARTH)
	4	WHITE	CAN High
	5	n/a	Not used, no internal connection
Plug Type: Side entry 3.5 mm, 8.4 pluggable with latching screw down			

Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

CAN networks must include a 120 Ω termination resistor at each end of the trunk line. It is recommended to design the network trunk to be less than 100 meters with a max cumulative drop length of less than 39 meters. Drop cables connecting a device to the trunk line should be as short as possible and much less than 6 meters. For 1 Mbit/sec communication each drop cable must be less than 1 meter.

Field Wiring and Diagrams

General Wiring Recommendations

- Inputs/Outputs: Use 0.5 mm² / 20 AWG, 2-wire, shielded twisted pair cable (<300 m)
- Power: Use 0.5 mm² / 20 AWG, 2-wire cable. Limit daisy chains to 16 nodes
- CAN: Use Belden YR58684, 0.3 mm² / 22 AWG, 3-wire comms cable (2008-1512)
- **CAN Terminations**: Use 120 Ω ± 10 Ω at each end of the network
- CAN Stub Lengths: Short as possible (< 1 m is best)
- Shielding: All CAN and I/O signals must be shielded for best performance
- **EARTH Connections**: The DIN-rail clip is the primary earth connection. The PE connection should be used when required for harsh environments where the DIN-rail ground may be compromised over time.


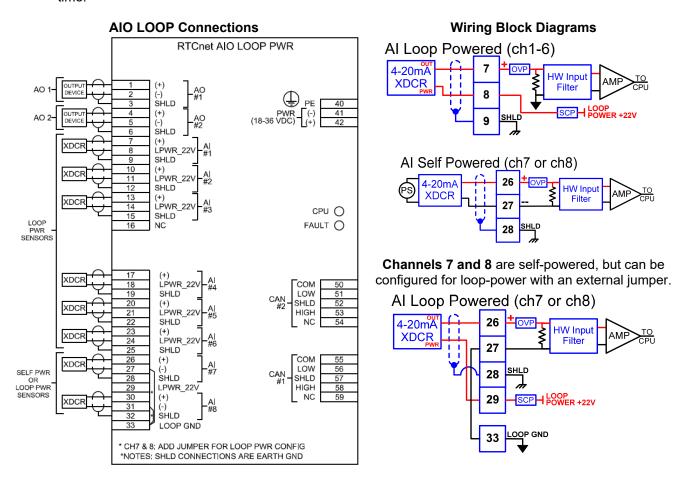


Figure 6-3. RTCnet AIO Loop Connections and Wiring Block Diagrams

AIO Connections RTCnet AIO (+) (-) SHLD (+) (-) SHLD (+) (-) SHLD (+) (-) SHLD XDCF CPU () FAULT () NC (+) (-) SHLD XDCR LOW (+) SHLD XDCF HIGH SHLD (+) XDCR (-) SHLD (+)XDCR LOW (-) SHLD SHLD LPWR 22V HIGH NC (+) XDCR SHLD LOOP-GND *NOTES; SHLD CONNECTIONS ARE EARTH GND

Wiring Block Diagrams



Channels 7 and 8 are self-powered, but can be configured for loop-power with an external jumper.

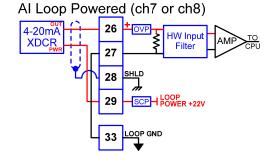


Figure 6-4. RTCnet AIO Connections and Wiring Block Diagrams

Status Indicators and Trouble Codes

Each node displays a green CPU LED and a red FAULT LED to help in troubleshooting if the module has a problem.

CPU (green): This indicates the CPU has power and is capable of running. It also indicates that the firmware is correct for the board. For long term reliability reasons, this LED is dimmer at high temperatures and turned OFF for high temperature, out of spec conditions.

FAULT (red): A solid red LED indicates that the node has not been initialized by the Network Master. A flashing red LED indicates a CAN communication fault or hardware problem. A table of fault LED flash-codes is shown below:

Table 6-3. AIO Fault/Status Indicators

AIO Fault / Status	FlashCode
The Node is not initialized or is in a pre-operational state	Solid Red
CAN - CORE_SYNC_ERR	1,1
CAN - COMMUNICATION_CAN_ALL_ERR	1,2
CAN1 - COMMUNICATION TX ERROR	1,3
CAN1 - COMMUNICATION RX ERROR	1,4
CAN1 - COMMUNICATION BUS OFF ERROR	1,5
CAN1 - COMMUNICATION_WARNING_LIMIT_REACHED ERROR	1,6
CAN - CORE_TIMESTAMP_VALUE_ERR	1,7
CAN - COMMUNICATION_BAUD_RATE_ERR	2,1
CAN - COMMUNICATION_NODE_ID_ERR	2,2
CAN2 - COMMUNICATION TX ERROR	2,3
CAN2 - COMMUNICATION RX ERROR	2,4
CAN2 - COMMUNICATION BUS OFF ERROR	2,5
CAN2 - COMMUNICATION_WARNING_LIMIT_REACHED_ERROR	2,6
CAN1 - COMMUNICATION_RPDO4_SLIP_ERROR	3,07
CAN2 - COMMUNICATION_RPDO4_SLIP_ERROR	3,08
APP_CHANNELO_HW_LOW_LIMIT_ERR	4,1
APP_CHANNEL1_HW_LOW_LIMIT_ERR	4,2
APP_CHANNEL2_HW_LOW_LIMIT_ERR	4,3
APP_CHANNEL3_HW_LOW_LIMIT_ERR	4,4
APP_CHANNEL4_HW_LOW_LIMIT_ERR	4,5
APP_CHANNEL5_HW_LOW_LIMIT_ERR	4,6
APP_CHANNEL6_HW_LOW_LIMIT_ERR	4,7
APP_CHANNEL7_HW_LOW_LIMIT_ERR	4,8
CORE_MAIN3_RATE_GROUP_DATA_WATCHDOG_ERR	5,3
CORE_EEPROM_WRITE_ERR	8,01
CORE_EEPROM_READ_ERR	8,02
CORE_PARAMETER_ERR	8,03
CORE_PARAMETER_VERSION_ERR	8,04
CORE_STACK_OVERFLOW_WARNING_ERR	8,05
CORE_SENSE_5V_RANGE_ERR	8,06
CORE_SENSE_15V_RANGE_ERR	8,12
CORE_SENSE_m15V_RANGE_ERR	8,13
CORE_SENSE_LOOP22V_RANGE_ERR	8,15
CORE_INTERNAL_ADC_ERR	9,1

Chapter 7. Discrete Input Nodes (16ch)

Description and Features

The Discrete Input (DI) node is a CANopen based distributed I/O module that interfaces to either a Woodward RTCnet or LINKnet HT network. RTCnet products are designed for synchronous real-time, deterministic operation whereas LINKnet HT products are designed for slower asynchronous networks.

This module provides (16) discrete input channels for +24 V (dc) signals. An isolated Contact Power for the inputs is provided as +24 V (dc) and includes short-circuit/over-voltage protection.


Features

- (16) Discrete Input Channels for +24 V (dc) signals
- Contact Power +24 V is provided with short-circuit and over-voltage protection
- High temperature/reliability design for 100 °C environments
- High vibration design suitable for industrial turbine/engine skid-mounting
- Designed for operation with MicroNet Plus and redundant CPU failover
- Woodward GAP block, diagnostics, and configuration support
- 3-way isolated design separating power, communications, and inputs

CAN Communications (isolated)

- Baud rate configuration for 1 Mbit, 500 Kbit, 250 Kbit, and 125 Kbit
- RTCnet supported GAP update rates of 10 ms, 20 ms, 40 ms, 80 ms, 160 ms
- LINKnet HT supported GAP update rates of 100 ms, 200 ms, etc (up to 1 second)

RTCnet, Real-Time (2 isolated CAN ports)

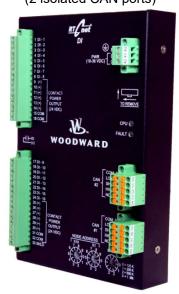

LINKnet-HT, Non Real-Time

(1 isolated CAN port)

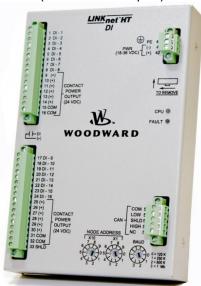


Figure 7-1. DI RTCnet and DI LINKnet-HT

Block Diagram

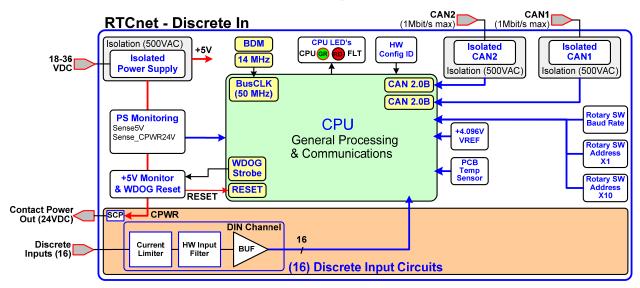


Figure 7-2. RTCnet DI Block Diagram

Specifications

Environment

Operating Temperature	–40 °C to +100 °C
Storage Temperature	-40 °C to +105 °C, recommend 20 °C to 40 °C for long life
Vibration	8.2 Grms, skid mount, per Woodward RV1
Shock	40 G, 3x each axis, per Woodward MS1
Ingress Rating / Installation	IP20, Pollution Degree 2, Overvoltage Category 3
EMC Emissions	EN 61000-6-4 (Heavy Industrial)
EIVIC EITIISSIOTIS	IACS UR E10 (Commercial Marine)
EMC Immunity	EN 61000-6-2 (Heavy Industrial)
EWC IIIIIIIIIIII	IACS UR E10 (Commercial Marine)

Input Power

Input Power (watts)	5.8 W max
Input Voltage (DC)	(18 to 36) V (dc)
Input Voltage (AC ripple)	< 1.5 V (ac), 50 Hz to 1 kHz
Input Isolation	500 V (ac) to chassis, CAN1, CAN2, and I/O channels
Overvoltage Protection	±60 V (dc), includes reverse polarity protection
Wire size (to pade)	0.5 mm ² / 20 AWG for two wires,
Wire size (to node)	1.3 mm ² / 16 AWG max for single wires
Wire size (main distribution)	< 300 m, 3 mm ² / 12 AWG or larger
Wiring & Source Impedance	< 5.4 Ω, 300 μH max

Functional

Number of Channels	16
DI Channel Input Voltage	(18 to 36) V (dc)
DI Channel Input Current, R	(5 ± 2) mA (input resistance of 50K)
DI Channel Hardware Filter	1.0 ms (0.75–1.4 ms), single pole, room temp
DI Channel Isolation	0 V channel to channel 500 V (ac) to PS Input, CAN1, CAN2, and EARTH
DI Channel Firmware Filter	noise filter of 150 μs (3 samples @ 50 μs/each)
Contact Power Output	24 V ±14 %, (0 to 200) mA, short circuit & diode protected
Contact Power Isolation	500 V (ac) to PS Input, CAN1, CAN2, and EARTH
Internal Temp Sensor	±1.0 °C typical (value available thru CANbus)

Miswire protection (DI)	short-circuit to earth / each other
Miswire protection (CPWR)	reverse polarity, short-circuit to earth / each other
Over-voltage Protection	Overvoltage to 36 V (dc), reverse polarity, short-circuit

Configuration

Rotary switches are provided to configure the **Network Address** and **Baud Rate** (125K, 250K, 500K, 1 Mbit). The **Network Address** (Node ID) is configurable from 1-99 using the x10 and x1 rotary switches. For example, to configure node 29 address set x10=2 and x1=9.

Software Configuration: Woodward's GAP application is a block language programmer tool that provides specific blocks for each node type. GAP blocks exist to configure and monitor the node channels, update rates, and faults.

Connector Pinouts

Input Power

Power is provided through a 3 position, latching terminal block with removable plug.

Table 7-1. Input Power Connector Pinout

Board Connection	PIN	Color	Description
1 4 4 4	1	EARTH	Optional earth / shield connection
	2	BLACK	Input Power (–)
	3	RED	Input Power (+)
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			
Max wire size: 1.3 mm ² / 16 AWG for single wires, 0.5 mm ² / 20 AWG for two wires			

CAN Port(s)

Every RTCnet/LINKnet HT node provides a CAN1 communication port (5 position, latching) for network communications. Removable mating plug(s) are provided for field wiring.

RTCnet, real-time nodes provide an additional CAN2 connection for those systems that require redundant network wiring. The redundant CPU's in a MicroNet Plus Control will control both ports properly during CPU failover events.

Table 7-2. CAN Connector Pinout

Board Connection	PIN	Color	Description
	1	BLACK	CAN Signal Ground
	2	BLUE	CAN Low
	3	Shield	CAN Shield (30 Meg + AC coupled to EARTH)
	4	WHITE	CAN High
	5	n/a	Not used, no internal connection
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			
Max wire size: 1.3 mm ² / 16 AWG for single wires, 0.5 mm ² / 20 AWG for two wires			

CAN networks must include a 120 Ω termination resistor at each end of the trunk line. It is recommended to design the network trunk to be less than 100 meters with a max cumulative drop length of less than 39 meters. Drop cables connecting a device to the trunk line should be as short as possible and much less than 6 meters. For 1 Mbit/s communication each drop cable must be less than 1 meter.

Field Wiring and Diagrams

General Wiring Recommendations

- Inputs: Use (0.3 to 1.3) mm² / (16 to 22) AWG, single or multi-conductor cable (<30 m), shielded is best
- Power: Use 0.5 mm² / 20 AWG, 2-wire cable. Limit daisy chains to 16 nodes
- **CAN**: Use Belden YR58684, 0.3 mm² / 22 AWG, 3-wire comms cable (2008-1512)
- **CAN Terminations**: Use 120 Ω ± 10 Ω at each end of the network
- **CAN Stub Lengths**: Short as possible (< 1 m is best)
- Shielding: All CAN signals must be shielded for best performance
- **EARTH Connections**: The DIN-rail clip is the primary earth connection. The PE connection should be used when required for harsh environments where the DIN-rail ground may be compromised over time.

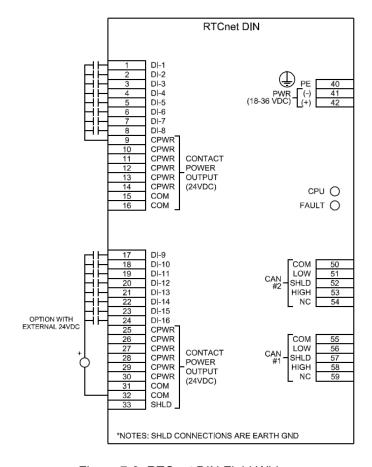


Figure 7-3. RTCnet DIN Field Wiring

Status Indicators and Trouble Codes

Each node displays a green CPU LED and a red FAULT LED to help in troubleshooting if the module has a problem.

CPU (green): This indicates the CPU has power and is capable of running. It also indicates that the firmware is correct for the board. For long term reliability reasons, this LED is dimmer at high temperatures and turned OFF for high temperature, out of spec conditions.

FAULT (red): A solid red LED indicates that the node has not been initialized by the Network Master. A flashing red LED indicates a CAN communication fault or hardware problem. A table of fault LED flash-codes is shown below:

Table 7-3. DIN Fault/Status Indicators

DIN Fault / Status	FlashCode
The Node is not initialized or is in a pre-operational state	Solid Red
CAN - CORE_SYNC_ERR	1,1
CAN - COMMUNICATION_CAN_ALL_ERR	1,2
CAN1 - COMMUNICATION TX ERROR	1,3
CAN1 - COMMUNICATION RX ERROR	1,4
CAN1 - COMMUNICATION BUS OFF ERROR	1,5
CAN1 - COMMUNICATION_WARNING_LIMIT_REACHED ERROR	1,6
CAN - CORE_TIMESTAMP_VALUE_ERR	1,7
CAN - COMMUNICATION_BAUD_RATE_ERR	2,1
CAN - COMMUNICATION_NODE_ID_ERR	2,2
CAN2 - COMMUNICATION TX ERROR	2,3
CAN2 - COMMUNICATION RX ERROR	2,4
CAN2 - COMMUNICATION BUS OFF ERROR	2,5
CAN2 - COMMUNICATION_WARNING_LIMIT_REACHED_ERROR	2,6
CORE_EEPROM_WRITE_ERR	8,01
CORE_EEPROM_READ_ERR	8,02
CORE_PARAMETER_ERR	8,03
CORE_PARAMETER_VERSION_ERR	8,04
CORE_STACK_OVERFLOW_WARNING_ERR	8,05
CORE_SENCE_5V_RANGE_ERR	8,06
CORE_SENSE_CPWR24V_RANGE_ERR	8,14
CORE_INTERNAL_ADC_ERR	9,1
CORE_LOW_VOLTAGE_RESET_ERR	9,2

Chapter 8. Discrete Out Relay Driver Nodes (16ch)

Description and Features

The Discrete Output Relay Driver (DO) node is a CANopen based distributed I/O module that interfaces to either a Woodward RTCnet or LINKnet HT network. RTCnet products are designed for synchronous real-time, deterministic operation whereas LINKnet HT products are designed for slower asynchronous networks.

This module provides (16) discrete output low-side driver channels that are capable of sinking up to 250 mA when used to drive external relays. Each output channel includes a readback fault that monitors the coil / load voltage.

Features

- (16) Discrete Output Channels with readback fault
- High temperature/reliability design for 100 °C environments
- High vibration design suitable for industrial turbine/engine skid-mounting
- Designed for operation with MicroNet Plus and redundant CPU failover
- Woodward GAP block, diagnostics, and configuration support
- 3-way isolated design separating power, communications, and outputs

CAN Communications (isolated)

- Baud rate configuration for 1 Mbit, 500 Kbit, 250 Kbit, and 125 Kbit
- RTCnet supported GAP update rates of 10 ms, 20 ms, 40 ms, 80 ms, 160 ms
- LINKnet HT supported GAP update rates of 100 ms, 200 ms, etc (up to 1 second)

RTCnet, Real-Time (2 isolated CAN ports)

The pool of the po

LINKnet-HT, Non Real-Time

(1 isolated CAN port)

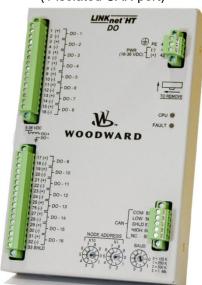


Figure 8-1. RTCnet DO and LINKnet-HT DO

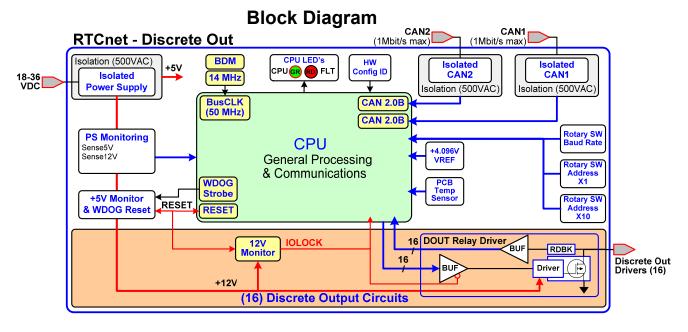


Figure 8-2. RTCnet DO Block Diagram

Specifications

Environment

1011110111	
Operating Temperature	−40 °C to +100 °C
Storage Temperature	-40 °C to +105 °C, recommend 20 °C to 40 °C for long life
Vibration	8.2 Grms, skid mount, per Woodward RV1
Shock	40 G, 3x each axis, per Woodward MS1
Ingress Rating / Installation	IP20, Pollution Degree 2, Overvoltage Category 3
EMC Emissions	EN 61000-6-4 (Heavy Industrial)
	IACS UR E10 (Commercial Marine)
EMC Immunity	EN 61000-6-2 (Heavy Industrial)
	IACS UR E10 (Commercial Marine)

Input Power

Input Power (watts)	4.2 W max
Input Voltage (DC)	(18 to 36) V (dc)
Input Voltage (AC ripple)	< 1.5 V (ac), 50 Hz to 1 kHz
Input Isolation	500 V (ac) to chassis, CAN1, CAN2, and I/O channels
Overvoltage Protection	±60 V (dc), includes reverse polarity protection
Wire size (to node)	0.5 mm ² / 20 AWG for two wires,
	1.3 mm ² / 16 AWG max for single wires
Wire size (main distribution)	< 300 m, 3 mm ² / 12 AWG or larger
Wiring & Source Impedance	< 5.4 Ω, 300 μH max

Functional

Number of channels	16, low-side driver type
DOUT Load Voltage	(5 to 36) V (dc), customer supplied
DOUT Load Current	250 mA max per channel
DOUT Readback	High/Low coil voltage status available
DOUT Leakage (OFF)	< 650 μA
DOUT Channel Isolation	0 V channel to channel (except what external relay provides) 500 V (ac) to PS Input, CAN1, CAN2, and EARTH
IOLOCK State	DOUT circuits are de-energized during power-up, power-down, voltage failures (5 V, 12 V), and watchdog failures
RDBK Filter (hw/sw)	~1 ms, single pole with 150 µs digital noise filter
Internal Temp Sensor	±1.0 °C typical (value available thru CANbus)
Miswire Protection	reverse polarity, short-circuit to earth / each other
Over-voltage Protection	Overvoltage to 36 V (dc), reverse polarity, short-circuit
Over-current Protection	FET over-current protection at 10 A
Over-temperature	FET protection and shutdown at Tj=150 °C

Configuration

Rotary switches are provided to configure the **Network Address** and **Baud Rate** (125K, 250K, 500K, 1 Mbit). The **Network Address** (Node ID) is configurable from 1-99 using the x10 and x1 rotary switches. For example, to configure node 29 address set x10=2 and x1=9.

Software Configuration: Woodward's GAP application is a block language programmer tool that provides specific blocks for each node type. GAP blocks exist to configure and monitor the node channels, update rates, and faults.

Connector Pinouts

Input Power

Power is provided through a 3 position, latching terminal block with removable plug.

Table 8-1. Input Power Connector Pinout

Board Connection	PIN	Color	Description
+++	1	EARTH	Optional earth / shield connection
	2	BLACK	Input Power (–)
1	3	RED	Input Power (+)
Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down			

CAN Port(s)

Every RTCnet/LINKnet HT node provides a CAN1 communication port (5 position, latching) for network communications. Removable mating plug(s) are provided for field wiring.

Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

RTCnet, real-time nodes provide an additional CAN2 connection for those systems that require redundant network wiring. The redundant CPU's in a MicroNet Plus Control will control both ports properly during CPU failover events.

Table 8-2. CAN Connector Pinout

Board Connection	PIN	Color	Description
	1	BLACK	CAN Signal Ground
* * * * * * *	2	BLUE	CAN Low
	3	Shield	CAN Shield (30 Meg + AC coupled to EARTH)
1 Property Ca	4	WHITE	CAN High
	5	n/a	Not used, no internal connection
Dlug Type: Side entry 2.5 mm, 9. A. pluggable with latching carew down			

Plug Type: Side entry 3.5 mm, 8 A, pluggable with latching screw down Max wire size: 1.3 mm² / 16 AWG for single wires, 0.5 mm² / 20 AWG for two wires

CAN networks must include a $120~\Omega$ termination resistor at each end of the trunk line. It is recommended to design the network trunk to be less than 100 meters with a max cumulative drop length of less than 39 meters. Drop cables connecting a device to the trunk line should be as short as possible and much less than 6 meters. For 1~Mbit/sec communication each drop cable must be less than 1~meter.

Field Wiring and Diagrams

General Wiring Recommendations

- Inputs: Use (0.3 to 1.3) mm² / (16 to 22) AWG, single or multi-conductor cable (<30 m), shielded is best
- Power: Use 0.5 mm² / 20 AWG, 2-wire cable. Limite daisy chains to 16 nodes
- **CAN**: Use Belden YR58684, 0.3 mm² / 22 AWG, 3-wire comms cable (2008-1512)
- **CAN Terminations**: Use 120 Ω ± 10 Ω at each end of the network
- CAN Stub Lengths: Short as possible (< 1 m is best)
- Shielding: All CAN signals must be shielded for best performance
- **EARTH Connections**: The DIN-rail clip is the primary earth connection. The PE connection should be used when required for harsh environments where the DIN-rail ground may be compromised over time.

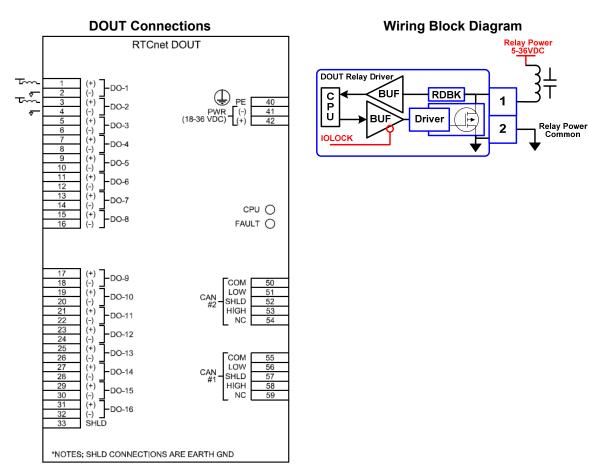


Figure 8-3. DOUT Connections and Wiring Block Diagram

Status Indicators and Trouble Codes

Each node displays a green CPU LED and a red FAULT LED to help in troubleshooting if the module has a problem.

CPU (green): This indicates the CPU has power and is capable of running. It also indicates that the firmware is correct for the board. For long term reliability reasons, this LED is dimmer at high temperatures and turned OFF for high temperature, out of spec conditions.

FAULT (red): A solid red LED indicates that the node has not been initialized by the Network Master. A flashing red LED indicates a CAN communication fault or hardware problem. A table of fault LED flash-codes is shown below:

Table 8-3. DOUT Fault/Status Indicators

DOUT Fault / Status	FlashCode
The Node is not initialized or is in a pre-operational state	Solid Red
CAN - CORE_SYNC_ERR	1,1
CAN - COMMUNICATION_CAN_ALL_ERR	1,2
CAN1 - COMMUNICATION TX ERROR	1,3
CAN1 - COMMUNICATION RX ERROR	1,4
CAN1 - COMMUNICATION BUS OFF ERROR	1,5
CAN1 - COMMUNICATION_WARNING_LIMIT_REACHED ERROR	1,6
CAN - CORE_TIMESTAMP_VALUE_ERR	1,7
CAN - COMMUNICATION_BAUD_RATE_ERR	2,1
CAN - COMMUNICATION_NODE_ID_ERR	2,2
CAN2 - COMMUNICATION TX ERROR	2,3
CAN2 - COMMUNICATION RX ERROR	2,4
CAN2 - COMMUNICATION BUS OFF ERROR	2,5
CAN2 - COMMUNICATION_WARNING_LIMIT_REACHED_ERROR	2,6
CAN1 - COMMUNICATION_RPDO1_SLIP ERROR	3,01
CAN2 - COMMUNICATION_RPDO1_SLIP ERROR	3,02
CORE_MAIN1_RATE_GROUP_DATA_WATCHDOG_ERR	5,1
CORE_EEPROM_WRITE_ERR	8,01
CORE_EEPROM_READ_ERR	8,02
CORE_PARAMETER_ERR	8,03
CORE_PARAMETER_VERSION_ERR	8,04
CORE_STACK_OVERFLOW_WARNING_ERR	8,05
CORE_SENSE_5V_RANGE_ERR	8,06
CORE_SENSE_12V_RANGE_ERR	8,07
CORE_IOLOCK_ERR	8,16
CORE_INTERNAL_ADC_ERR	9,1
CORE_LOW_VOLTAGE_RESET_ERR	9,2

Chapter 9. Product Support and Service Options

Product Support Options

If you are experiencing problems with the installation, or unsatisfactory performance of a Woodward product, the following options are available:

- Consult the troubleshooting guide in the manual.
- Contact the manufacturer or packager of your system.
- Contact the Woodward Full Service Distributor serving your area.
- Contact Woodward technical assistance (see "How to Contact Woodward" later in this chapter) and discuss your problem. In many cases, your problem can be resolved over the phone. If not, you can select which course of action to pursue based on the available services listed in this chapter.

OEM or Packager Support: Many Woodward controls and control devices are installed into the equipment system and programmed by an Original Equipment Manufacturer (OEM) or Equipment Packager at their factory. In some cases, the programming is password-protected by the OEM or packager, and they are the best source for product service and support. Warranty service for Woodward products shipped with an equipment system should also be handled through the OEM or Packager. Please review your equipment system documentation for details.

Woodward Business Partner Support: Woodward works with and supports a global network of independent business partners whose mission is to serve the users of Woodward controls, as described here:

- A **Full Service Distributor** has the primary responsibility for sales, service, system integration solutions, technical desk support, and aftermarket marketing of standard Woodward products within a specific geographic area and market segment.
- An Authorized Independent Service Facility (AISF) provides authorized service that includes repairs, repair parts, and warranty service on Woodward's behalf. Service (not new unit sales) is an AISF's primary mission.
- A Recognized Turbine Retrofitter (RTR) is an independent company that does both steam and gas
 turbine control retrofits and upgrades globally, and can provide the full line of Woodward systems
 and components for the retrofits and overhauls, long term service contracts, emergency repairs, etc.

A current list of Woodward Business Partners is available at www.woodward.com/local-partner

Product Service Options

The following factory options for servicing Woodward products are available through your local Full-Service Distributor or the OEM or Packager of the equipment system, based on the standard Woodward Product and Service Warranty (5-01-1205) that is in effect at the time the product is originally shipped from Woodward or a service is performed:

- Replacement/Exchange (24-hour service)
- Flat Rate Repair
- Flat Rate Remanufacture

Replacement/Exchange: Replacement/Exchange is a premium program designed for the user who is in need of immediate service. It allows you to request and receive a like-new replacement unit in minimum time (usually within 24 hours of the request), providing a suitable unit is available at the time of the request, thereby minimizing costly downtime. This is a flat-rate program and includes the full standard Woodward product warranty (Woodward Product and Service Warranty 5-01-1205).

This option allows you to call your Full-Service Distributor in the event of an unexpected outage, or in advance of a scheduled outage, to request a replacement control unit. If the unit is available at the time of the call, it can usually be shipped out within 24 hours. You replace your field control unit with the like-new replacement and return the field unit to the Full-Service Distributor.

Charges for the Replacement/Exchange service are based on a flat rate plus shipping expenses. You are invoiced the flat rate replacement/exchange charge plus a core charge at the time the replacement unit is shipped. If the core (field unit) is returned within 60 days, a credit for the core charge will be issued.

Flat Rate Repair: Flat Rate Repair is available for the majority of standard products in the field. This program offers you repair service for your products with the advantage of knowing in advance what the cost will be. All repair work carries the standard Woodward service warranty (Woodward Product and Service Warranty 5-01-1205) on replaced parts and labor.

Flat Rate Remanufacture: Flat Rate Remanufacture is very similar to the Flat Rate Repair option with the exception that the unit will be returned to you in "like-new" condition and carry with it the full standard Woodward product warranty (Woodward Product and Service Warranty 5-01-1205). This option is applicable to mechanical products only.

Returning Equipment for Repair

If a control (or any part of an electronic control) is to be returned for repair, please contact your Full-Service Distributor in advance to obtain Return Authorization and shipping instructions.

When shipping the item(s), attach a tag with the following information:

- Return authorization number
- Name and location where the control is installed
- Name and phone number of contact person
- Complete Woodward part number(s) and serial number(s)
- Description of the problem
- Instructions describing the desired type of repair

Packing a Control

Use the following materials when returning a complete control:

- Protective caps on any connectors
- Antistatic protective bags on all electronic modules
- Packing materials that will not damage the surface of the unit
- At least 100 mm (4 inches) of tightly packed, industry-approved packing material
- A packing carton with double walls
- A strong tape around the outside of the carton for increased strength



To prevent damage to electronic components caused by improper handling, read and observe the precautions in Woodward manual 82715, Guide for Handling and Protection of Electronic Controls, Printed Circuit Boards, and Modules.

Replacement Parts

When ordering replacement parts for controls, include the following information:

- The part number(s) (XXXX-XXXX) that is on the enclosure nameplate
- The unit serial number, which is also on the nameplate

Engineering Services

Woodward offers various Engineering Services for our products. For these services, you can contact us by telephone, by email, or through the Woodward website.

- Technical Support
- Product Training
- Field Service

Technical Support is available from your equipment system supplier, your local Full-Service Distributor, or from many of Woodward's worldwide locations, depending upon the product and application. This service can assist you with technical questions or problem solving during the normal business hours of the Woodward location you contact. Emergency assistance is also available during non-business hours by phoning Woodward and stating the urgency of your problem.

Product Training is available as standard classes at many of our worldwide locations. We also offer customized classes, which can be tailored to your needs and can be held at one of our locations or at your site. This training, conducted by experienced personnel, will assure that you will be able to maintain system reliability and availability.

Field Service engineering on-site support is available, depending on the product and location, from many of our worldwide locations or from one of our Full-Service Distributors. The field engineers are experienced both on Woodward products as well as on much of the non-Woodward equipment with which our products interface.

For information on these services, please contact one of the Full-Service Distributors listed at www.woodward.com/local-partner.

Contacting Woodward's Support Organization

For the name of your nearest Woodward Full-Service Distributor or service facility, please consult our worldwide directory at https://www.woodward.com/support, which also contains the most current product support and contact information.

You can also contact the Woodward Customer Service Department at one of the following Woodward facilities to obtain the address and phone number of the nearest facility at which you can obtain information and service.

Duaduata Haadin

Engine Systems		
FacilityPhone Number		
Brazil+55 (19) 3708 4800		
China+86 (512) 8818 5515		
Germany +49 (711) 78954-510		
India+91 (124) 4399500		
Japan+81 (43) 213-2191		
Korea+ 82 (32) 422-5551		
The Netherlands+31 (23) 5661111		
United States+1 (970) 482-5811		

Products Used in

Products Used in Industrial
Turbomachinery Systems
FacilityPhone Number
Brazil+55 (19) 3708 4800
China+86 (512) 8818 5515
India+91 (124) 4399500
Japan+81 (43) 213-2191
Korea+ 82 (32) 422-5551
The Netherlands+31 (23) 5661111
Poland+48 (12) 295 13 00
United States+1 (970) 482-5811

Technical Assistance

If you need to contact technical assistance, you will need to provide the following information. Please write it down here before contacting the Engine OEM, the Packager, a Woodward Business Partner, or the Woodward factory:

General	
Your Name	
Site Location	
Phone Number	
Fax Number	
Prime Mover Information	
Manufacturer	
Turbine Model Number	
Type of Fuel (gas, steam, etc.)	
Power Output Rating	
Application (power generation, marine, etc.)	
Control/Governor Information	
Control/Governor #1	
Woodward Part Number & Rev. Letter	
Control Description or Governor Type	
Serial Number	
Control/Governor #2	
Woodward Part Number & Rev. Letter	
Control Description or Governor Type	
Serial Number	
Control/Governor #3	
Woodward Part Number & Rev. Letter	
Control Description or Governor Type	
Serial Number	
Symptoms	
Description	

If you have an electronic or programmable control, please have the adjustment setting positions or the menu settings written down and with you at the time of the call.

Revision History

Changes in Revision A

- Revised Regulatory Compliance section
- Added content to Special Conditions for Safe Use
- Replaced EU DoC
- Added UKCA Doc

Changes in Revision —

New manual

Declarations

EU DECLARATION OF CONFORMITY

EU DoC No.: 00427-04-EU-02-01 WOODWARD INC. Manufacturer's Name:

Manufacturer's Contact Address: Skarbowa 32

32-005 Niepolomice, Poland

Model Name(s)/Number(s): RTCnet / LinkNet-HT Modules

The object of the declaration described above is in conformity with the following relevant Union harmonization legislation:

Directive 2014/34/EU of the European Parliament and of the Council of 26 February 2014 on the harmonization of the laws of the Member States relating to equipment and protective systems intended for use in potentially explosive

atmospheres

Directive 2014/30/EU of the European Parliament and of the Council of 26 February 2014 on the harmonization of the laws of the Member States relating

to electromagnetic compatibility (EMC)

Markings in addition to CE marking:

(x) II 3 G, Ex nA IIC T4 Gc

Applicable Standards:

ATEX: EN60079-0, 2018: Electrical apparatus for explosive gas atmospheres - Part 0:

Equipment - General Requirements

EN60079-15, 2010: Electrical apparatus for explosive gas atmospheres - Part 15: Construction, Test and Marking for Type of protection 'n' electrical apparatus

EMC: EN61000-6-2:2019: EMC Part 6-2: Generic Standards - Immunity for Industrial

Environments

EN61000-6-4:2019: EMC Part 6-4: Generic Standards - Emissions for Industrial

Environments

Conformity Assessment: Woodward EMC Conformity Assessment 00427-04-EU-EMC-03-06

This declaration of conformity is issued under the sole responsibility of the manufacturer We, the undersigned, hereby declare that the equipment specified above conforms to the above Directive(s).

MANUFACTURER

Signature

Annette Lynch

Full Name

Engineering Manager

Position

Woodward, Fort Collins, CO USA

Place

06-FEBRUARY-2023

Date

UKCA DECLARATION OF CONFORMITY

UKCA DoC No.: 00427-04-EU-UKCA-02-01
Manufacturer's Name: WOODWARD INC.

Manufacturer's Contact Address: Skarbowa 32,

32-005 Niepolomice, Poland

Model Name(s)/Number(s): RTCNet / LinkNet-HT Modules

Markings in addition to UKCA marking:

⟨£x⟩ II 3 G, Ex nA IIC T4 Gc

The object of this Declaration is in full conformity with the following UK Statutory Instruments (and their amendments):

Appropriate S.I.	Description of S.I.		
S.I. 2016 No. 1107	Equipment and Protective Systems Intended for use in Potentially Explosive Atmospheres Regulations 2016		
S.I. 2016 No. 1091	Electromagnetic Compatibility Regulations 2016		

The Object of this Declaration is in conformity with the applicable requirements of the following designated standards and technical specifications.

Appropriate Standard	Description of Standard
EN 60079-0:2018	Explosive atmospheres - Part 0: Equipment - General requirements
EN 60079-15:2010	Explosive atmospheres - Part 15: Equipment protection by type of protection "n".
EN 61000-6-2:2019	Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments.
EN 61000-6-4:2019	Electromagnetic compatibility (EMC) - Part 6-4: Generic standards - Emission standard for industrial environments.

This declaration of conformity is issued under the sole responsibility of the manufacturer We, the undersigned, hereby declare that the equipment specified above conforms to the above Regulations(s).

MANUFACTURER

Signature

Annette Lynch

Full Name

Position

Woodward, Fort Collins, CO, USA

Engineering Manager

Place

06-FEBRUARY-2023

Date

Page 1 of 1

5-09-1183 Rev 39

Released

We appreciate your comments about the content of our publications.

Send comments to: icinfo@woodward.com

Please reference publication 26640.





PO Box 1519, Fort Collins CO 80522-1519, USA 1000 East Drake Road, Fort Collins CO 80525, USA Phone +1 (970) 482-5811 • Fax +1 (970) 498-3058

Email and Website—www.woodward.com

Woodward has company-owned plants, subsidiaries, and branches, as well as authorized distributors and other authorized service and sales facilities throughout the world.

Complete address / phone / fax / email information for all locations is available on our website.