

# 2301D and 2301D-EC

## Digital Load Sharing and Speed Controls

### Applications

The Woodward 2301D and 2301D-EC provide load sharing and speed control of generators being driven by diesel or gaseous engines.

With the flexible configuration software incorporated in the 2301D and 2301D-EC hardware, application variations can now be selected using an external computer (PC). Changing the application to accommodate engine speed range, gear teeth, and selection of forward or reverse acting is a matter of software setup.

The 2301D-EC is capable of communicating using a Modbus RTU protocol, functioning as a Modbus slave device, via RS-232 or RS-422 drivers.

The 2301D and 2301D-EC have four operating modes:

#### Speed Control

Has multiple dynamics flexibility. Will work on pumps or compressors. Has capability for remote 4–20 mA speed reference through a configurable analog input.

#### Isochronous Load Sharing

Is compatible with most existing load sharing speed control systems. Now with soft load and unload capability.

#### Droop Base Load

Adjustable load control using discrete raise and lower contacts.

#### Isochronous Base Load

Provides constant load level operation against a bus. The load setting may be fixed, changed using discrete raise and lower inputs, or a remote 4–20 mA input.

### Description

The Woodward 2301D and 2301D-EC microprocessor-based controls function like the 2301A load sharing and speed control. The 2301D is a load sharing and speed control; the 2301D-EC is a load sharing and speed control with Extended (Modbus®\*) Communications.

The controls are housed in a sheet-metal chassis for ordinary and hazardous locations, and consist of a single printed circuit board.

The 2301D and 2301D-EC are configured using a computer with Woodward Watch Window software. The configuration software is supplied with each control or may be downloaded from the Woodward website ([www.woodward.com](http://www.woodward.com)). The computer connects to the 2301D and 2301D-EC through a 9-pin connector (RS-232 port).


The control operates from a 24 Vdc supply.

The 2301D and 2301D-EC include:

- 1 Load Sensor Circuit
- 1 Actuator Driver, 4–20 mA, 0–20 mA, or 0–200 mA
- 1 MPU Speed Sensor
- 1 Configurable Analog Output
- 2 Configurable Analog Inputs
- 8 Discrete (Switch) Inputs
- 4 Discrete (Relay Driver) Outputs

The 2301D operates within a range of –40 to +70 °C (–40 to +158 °F).

\*—Modbus is a trademark of Schneider Automation Inc.

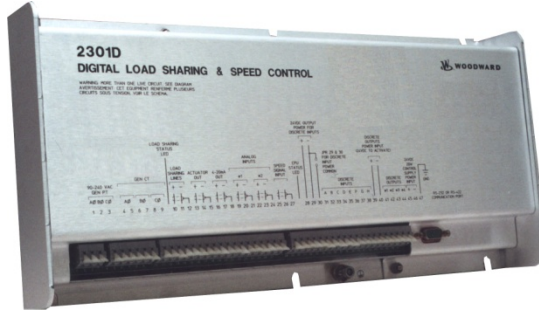

- Generator or pump applications
- Multiple dynamics
- Manifold Air Pressure (MAP) limiter
- Torque limiter
- New Low Speed Sensing functionality
- Remote speed & load reference
- Soft load transfer
- Automatic Idle to Rated switching
- Load Rejection / Load Pulse option
- Idle Droop function
- PC Configurable
- Optional Modbus® serial communications
- New adaptive speed sensing algorithm

# Regulatory Compliance

**NOTE**  
**European Compliance for CE Mark:**  
 EMC Directive  
 Low Voltage Directive

Some certifications apply to specific models only.

Certified to 89/336/EEC COUNCIL DIRECTIVE of 03 May 1989 on the approximation of the laws of the member states relating to electromagnetic compatibility.  
 Certified to the 73/23/EEC COUNCIL DIRECTIVE of 19 February 1973 on the harmonization of the laws of the Member States relating to electrical equipment designed for use within certain voltage limits.

**Marine Compliance:**  
 Bureau Veritas  
 Det Norske Veritas  
 Germanischer Lloyd  
 Lloyd's Register of Shipping  
 Registro Italiano Navale

BV Rules Part C, June 2000  
 Standard for Certification, No. 2.4.2001  
 Additional Rules and Guidelines, Part 1, 2001  
 Type Approval System, Test Specification Number 1, 2002  
 RINA Rules 2001 – Part C

**North American Compliance:**  
 UL  
 CSA


UL Listed for Ordinary Locations for use in Canada and the United States  
 CSA Certified for Class I, Division 2, Groups A, B, C, D, T4, and Ordinary Locations for use in Canada and the United States

**NOTE**

Wiring must be in accordance with applicable electric codes with the authority having jurisdiction. These listings are limited to those units bearing the UL or CSA agency identification.

**Technical Manual**

26288

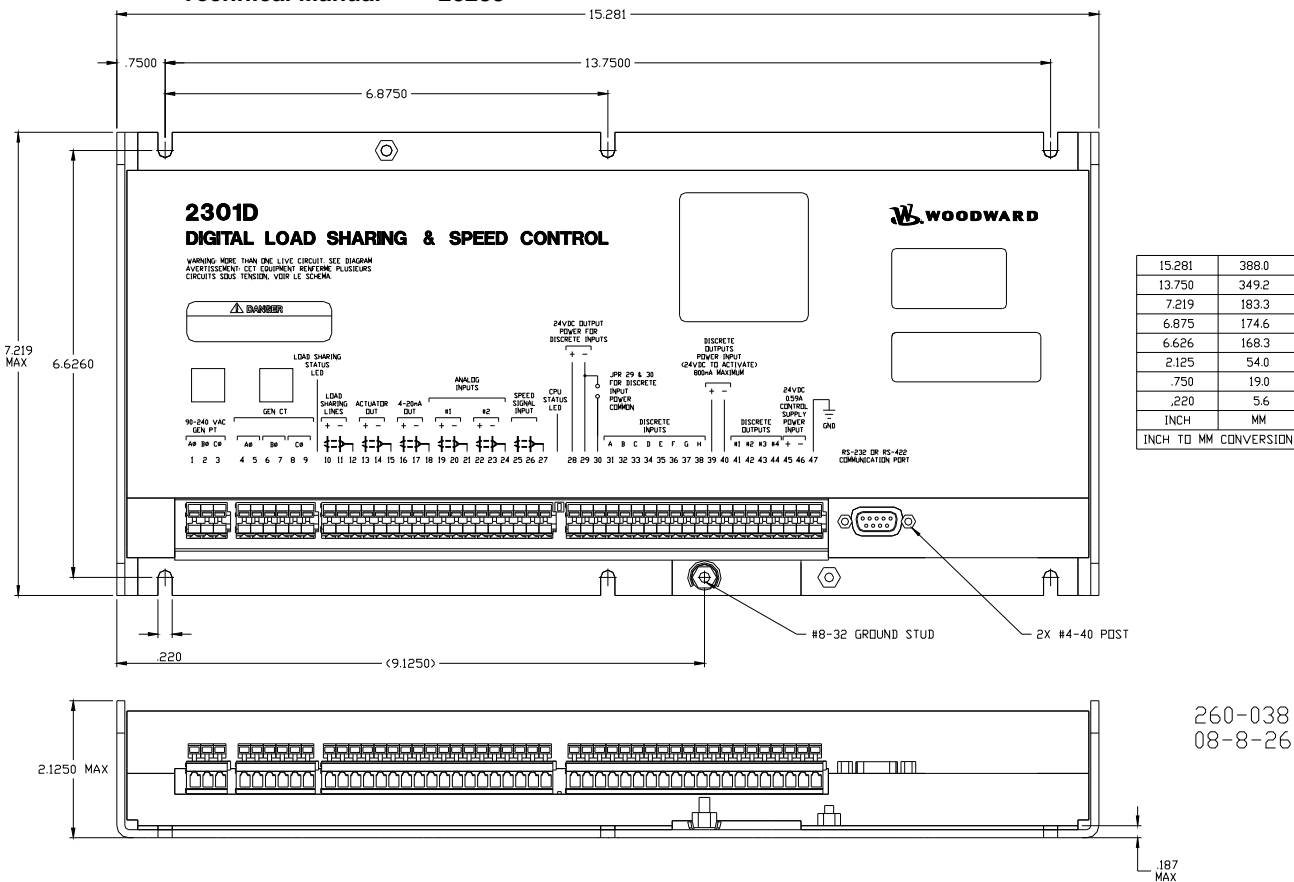

**2301D and 2301D-EC Digital Control (ordinary locations version shown) (Do not use for construction)**



PO Box 1519, Fort Collins CO, USA 80522-1519  
 1000 East Drake Road, Fort Collins CO 80525  
 Tel.: +1 (970) 482-5811 ♦ Fax: +1 (970) 498-3058  
[www.woodward.com](http://www.woodward.com)

**Distributors & Service**

Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

© Woodward 2000, All Rights Reserved

For more information contact:

2008/8/Fort Collins