

DTSC-200A



- › Premium ATS Controller
- › Reliability and Durability
- › Improves Operational Efficiency
- › Maintenance optimized
- › Modbus TCP communication ¹

The ultimate ATS controller for dependable power transfers in critical applications

The DTSC-200A (Digital Transfer Switch Control) is a premium Automatic Transfer Switch (ATS) controller designed for environments where uninterrupted power is essential, such as hospitals, data centers, office buildings, and manufacturing plants. It ensures safe and reliable electrical power transfer between sources, offering unparalleled versatility with multiple configurations, advanced monitoring, and customizable features. Built on a field-proven platform, the DTSC-200A combines cutting-edge technology, intuitive operation, and robust configurability to address the unique challenges of critical power systems while enhancing efficiency, safety, and user experience.



Improves System Safety

- › **In-Phase Monitoring:** Ensures transfers occur within a safe phase angle difference, reducing risks during source switching.
- › **Secure Overlap Control:** Shunt trip signals / remote breaker tripping prevent sources from being paralleled for longer than desired, ensuring safe operation. ²
- › **Prioritize critical loads** by shedding non-essential ones during power shortages. ²
- › **Elevator Pre-Signal:** Delivers a configurable timed warning signal to elevator systems prior to power transfers, enhancing building safety. ³



Improves Operational Efficiency

- › **Reduced Downtime:** Intelligent limit switch feedback ensures plausibility before initiating transfers, minimizing errors and delays.
- › **Protect sensitive equipment** by disconnecting motor loads during power transfers. ³
- › **Optimize power usage** by prioritizing your preferred energy source. ²
- › **Routine Health Checks:** engine exerciser programs (load tests) ensure emergency sources are regularly tested and ready for operation.

¹ Available in Package 2


² Via internal conditions or remote command

³ Neutral delay timers (1 to 6500 s), elevator pre-signal timers (1 to 6500 s), motor load disconnect timers (1 to 6500 s), stable timers (1 to 6500 s), outage timers (0.1 to 99.9 s), engine start delay timers (1 to 300 s)



Reduces Installation and Maintenance Complexity

- › **Global, Field-Proven Design:** Built on the trusted DTSC-200 platform, offering multilingual support including English, German, Spanish, Polish, Russian, and French to meet the needs of diverse users worldwide.
- › **Quick and Secure Setup:** Simply configure the system using Woodward's free software ToolKit™ connecting via USB or directly through the HMI panel, both with password protection for enhanced security.⁴
- › **Expandable I/O:** Supports additional discrete inputs and outputs via external Woodward IKD modules, providing flexibility for system expansions.
- › **Improved troubleshooting** based on event recorder with real time clock.
- › **Maintenance-Free Hardware:** Eliminates the need for servicing traditional device internal backup batteries by using maintenance-free super capacitors, ensuring reliable performance during power failures.



Simplifying Complex ATS Configurations

- › **Wide Application Support:** Easily configurable for Utility-to-Generator, Generator-to-Generator, or Utility-to-Utility systems using circuit breakers or latching contactors.
- › **Programmable Logic:** LogicsManager™ enables custom transfer schemes without external relay logic or separate PLCs, reducing system complexity and cost.
- › **Vector Group Adjustment:** Safeguarding system stability by minimizing risk of phase conflicts between power sources that involve transformers or generators with different phase configurations



Ensuring Reliability and Durability

- › **Uninterrupted Power for Critical Applications:** Prevents outages in environments where "lights out" is not an option, such as hospitals and data centers.
- › **Multiple Transfer Modes:** Supports open (break-before-make), delayed + timed neutral position (break-before-make) transition. Features also include:
- › **Fast and Secure** closed transitions (make-before-break)⁵ in less than 100ms with in-phase monitoring (synch check) to ensure safe and reliable transfers or extended parallel times for soft loading applications.
- › **Transfer commit:** Prevent interruptions by committing to a transfer once initiated.

Typical Application

- › Utility to Generator




- › Generator to Generator
- › (2 start signals)



- › Utility to Utility
- › (configurable phase angle)



- › Source 1 to Source 2

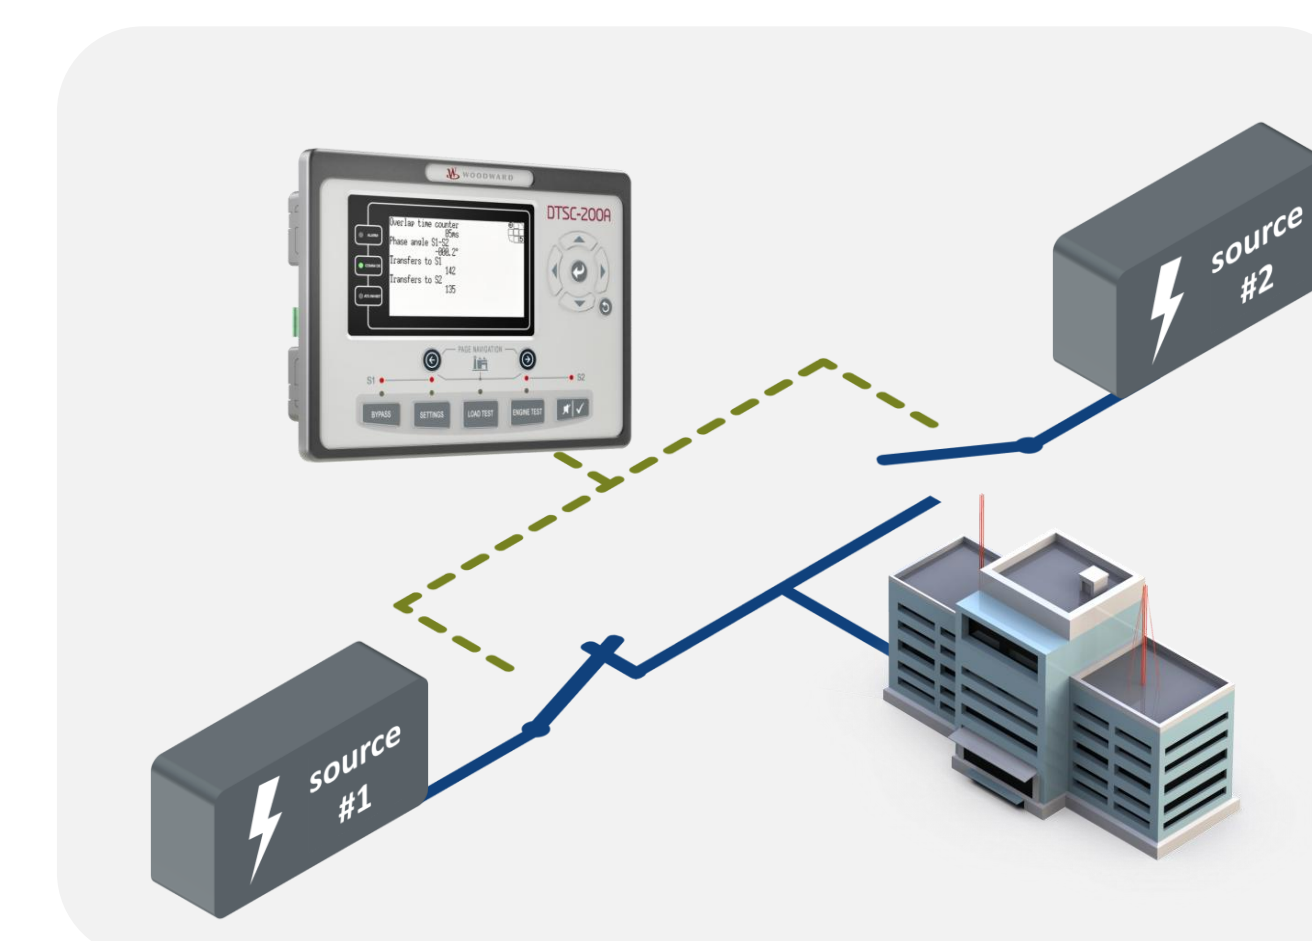

⁴ Configuration software 'Toolkit' available for free at Woodward.com or at product documentation site, <http://wwdmanuals.com/dtsc-200a>


⁵ Optimized to achieve short parallel (< 100ms) or extended long parallel as per LM status

Ordering Part Number

	Package 1	Package 2
Ethernet port	⊗	✓
Modbus TCP		
	8440-2297	8440-2323


**Field Upgrade**
Package 1 to 2
P/N: 10-068-303

Dimensions

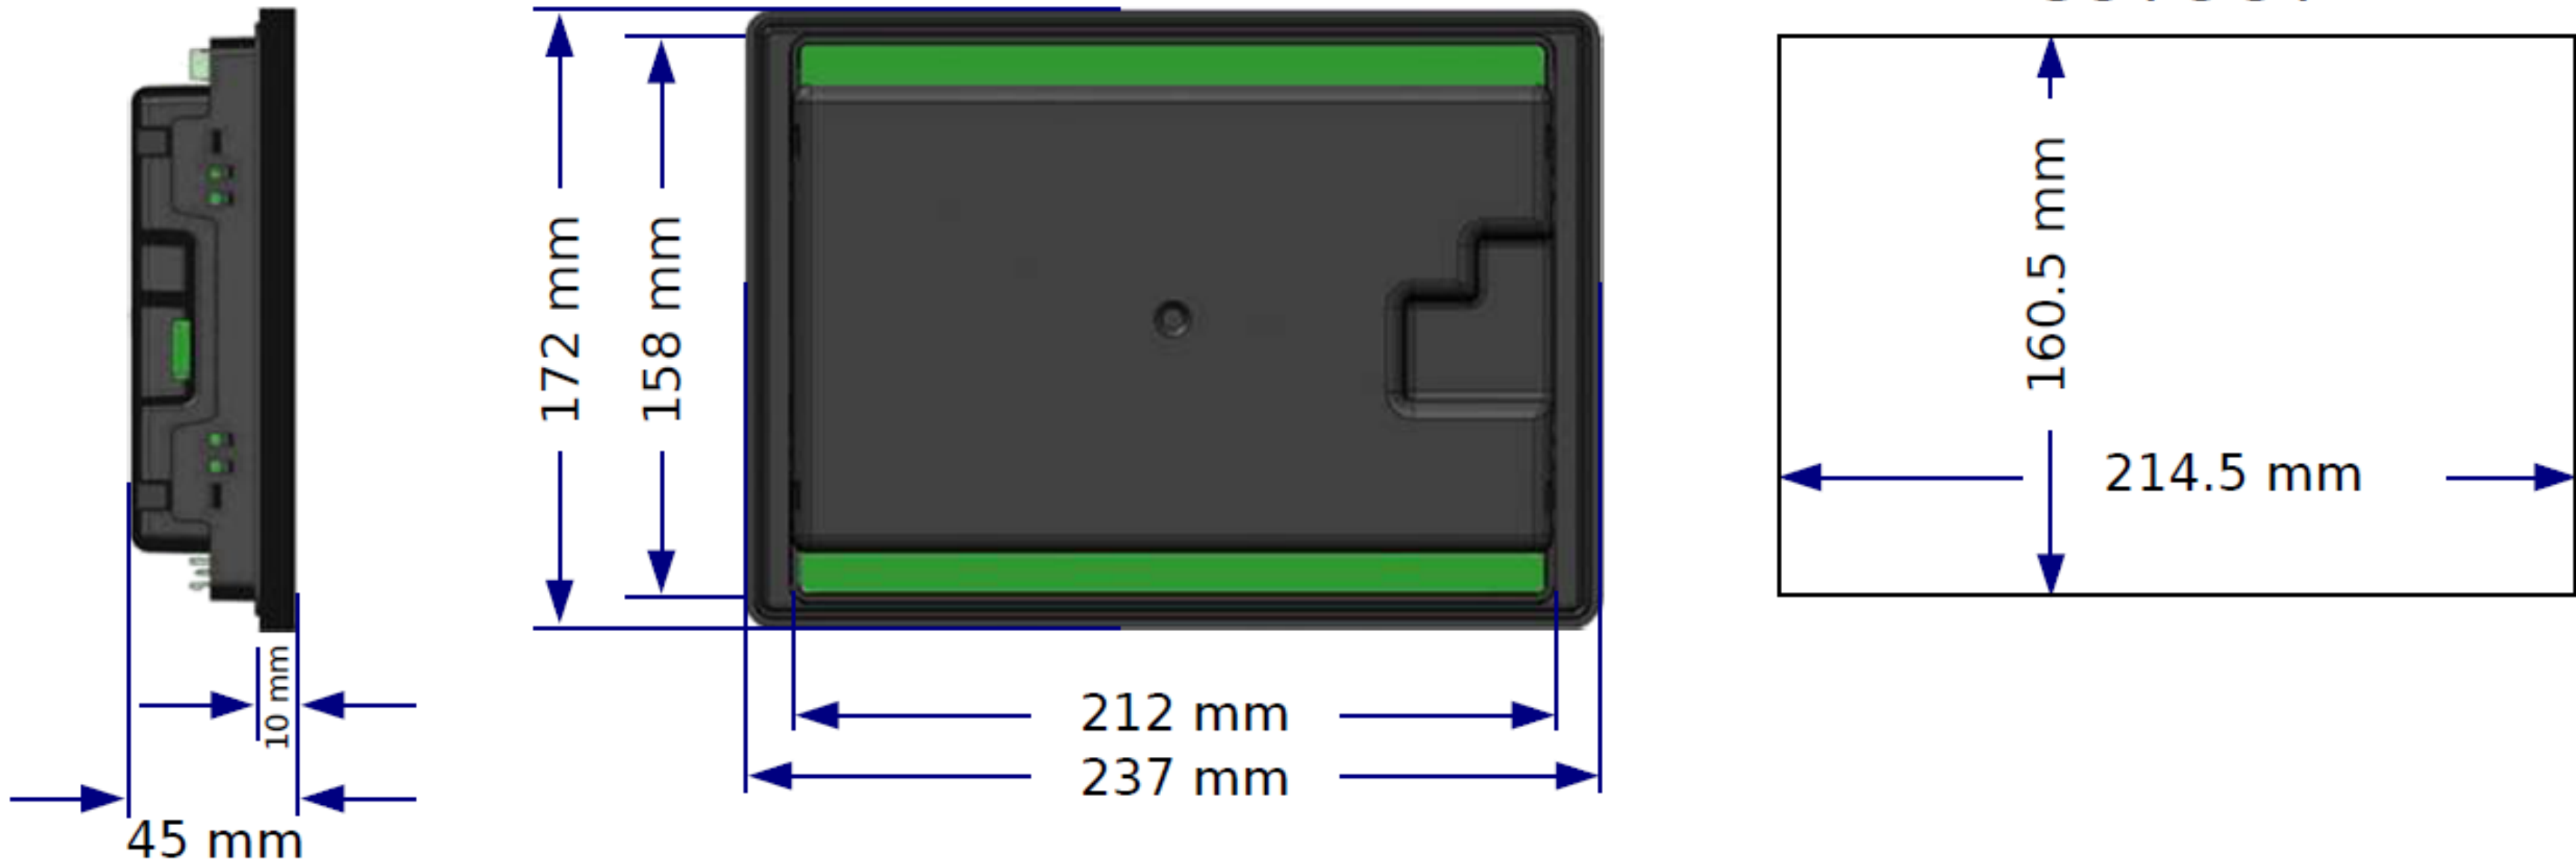

Accessories

Digital Expansion Boards

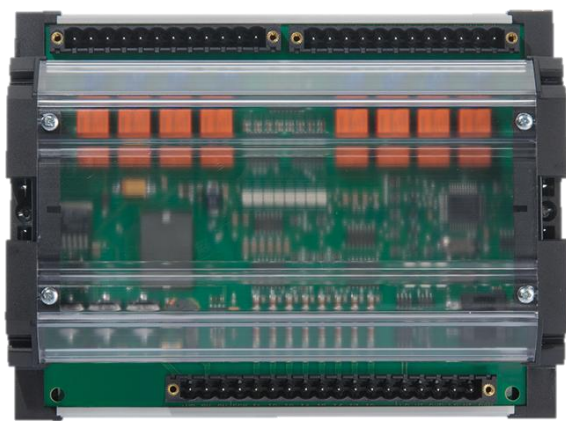

IKD1-M



IKD-IN-16



IKD-OUT-16

DTSC-200A SUPPORTED I/O EXTENSIONS	MAX. UNITS
IKD-OUT-16 and IKD-IN-16	1
IKD-1M	2

Software



[ToolKit](#) .
[IKD Configuration Tool](#) .

Spare Parts




Spare Connector Kit	10-004-675
Spare Mounting Kit	10-062-608

Internal I/Os	
Discrete inputs (configurable)	12
Discrete outputs (configurable)	8
External I/Os via IKD	
Discrete inputs (configurable)	Up to 16
Discrete outputs (configurable)	Up to 16
USB service port	✓
Highly Accurate Measuring	
True R.M.S. Source voltage (3phase/4-wire)	Class 1 for current and voltage
Load current (3phase/4-wire, true RMS)	5 A

Monitoring	ANSI
Source: voltage	59/27
Source: frequency	81O/81U
Source: voltage asymmetry	47
Source: rotation field	✓
Load: overload	32
Load: overcurrent	50 / 51
Switch: plausible switch position	✓
Switch: transition failure	✓
Battery: voltage	✓
Synch check (in-phase monitoring)	25
Parallel time monitoring	✓

Terminal Diagram

		microSD Not used		USB Device		RS232 Not used		Ethernet (Package 2)															
35	B(-)					DTSC-200A			61														
34	A(+)						Discrete Input [DI 12] ^{*1}	[DI 12]	60														
33	NC						Discrete Input [DI 11] ^{*1}	[DI 11]	59														
Not used					Discrete Input [DI 10] ^{*1}		[DI 10]	58															
					Discrete Input [DI 09] ^{*1}		[DI 09]	57															
					Discrete Input [DI 08] ^{*1}		[DI 08]	56															
					Not used		55																
							54																
53																							
52																							
51																							
26	NC						Load current	L3	50														
25	CAN-L							L2	49														
24	CAN-H							L1	48														
23	NC								47														
22	 [R05] Relay [R05] ^{*1} Engine start contact								46														
21							Not used						45										
20												Not used						44					
19																	Not used						43
18																						Not used	
17	Not used																						
16							Not used																
15												Not used											
14																	Not used						
13																						Not used	
12	Not used																						
11							Not used																
10												Not used											
9																	Not used						
8																						Not used	
7	Not used																						
6							Not used																
5												Not used											
4																	Not used						
3																						Not used	
2	Not used																						
1							Not used																
Screw terminals													24										
													23										
													22										
												21											
							20																
Power supply 8 to 35 Vdc Reverse polarity protected																							
Screw terminals																							
Subject to technical modifications					*1 configurable via LogicsManager					DTSC-200A Diagram													

Hardware Specifications

Power Supply	12/24 V _{DC} (8 to 35 V _{DC})
Intrinsic consumption	max. 6 W (standby max. 5 W)
Ambient temperature	Operation -25 to 70 °C -13 to 158 °F Storage -25 to 70 °C -13 to 158 °F
Ambient humidity	95%, non-condensing
Voltage	Y / Δ
Rated (V _{rated})	277 / 480 V _{AC}
Max. value (V _{max})	358 / 620 V _{AC}
Max. value (V _{max}) according to UL	173 / 300 V _{AC}
Accuracy	Class 1
Linear measuring range	1×V _{rated}
Measuring frequency	50/60 Hz (40 to 85 Hz)
High Impedance Input Resistance per path	4.0 MΩ
Max. power consumption per path	< 0.2 VA
Current (Isolated)	
Rated (I _{rated})	5A
Linear measuring range	I _{gen} = 2.0 × I _{rated}
Rated short-time overcurrent (1 s)	10 × I _{rated}
Accuracy	Class 1
Discrete Inputs	non isolated
Control method	connecting or disconnecting to battery minus signal

Commercial support

industrial.salesPG@woodward.com

Technical support



industrial.support@woodward.com

Product Documents and Files

http://wwdmanuals.com/DTSC-200A/



Powering a clean future

Display	Wear resistant and scratch resistant LCD due to hard acrylic screen	480 × 272 TFT LCD with backlight
Discrete Outputs [R 2-4]		isolated Rated 7 A _{DC} , 24 V _{DC} running standalone Rated 3 A _{DC} , 24 V _{DC} when running in parallel with other two relays 3 A _{DC} , 24 V _{DC} resistive GP (according to UL)
Discrete Output [R 5]		Isolated Rated 7 A _{AC} , 250 V _{AC} voltage free output, resistive GP
Discrete Outputs [R 6-7]		Isolated Rated 10 A _{DC} , 24 V _{DC} running standalone Rated 5 A _{DC} , 24 V _{DC} when running in parallel with the other relay 2 A _{DC} , 24 V _{DC} inductive (according to UL)
Discrete Output [R 8-9]		Isolated Rated 7 A _{AC} , 250 V _{AC} voltage free output, resistive GP
Interfaces		
Package 2: Ethernet RJ-45		Modbus TCP
USB service port Max. allowed cable length		1.5 m
RS-485 interface Insulation voltage Max. allowed cable length		Isolated 500 V _{AC} 1000 m
CAN bus interface Insulation voltage Internal line termination		Isolated 500 V _{AC} 120 Ω
Housing		
Front panel flush mounting		Plastic housing
Dimensions (W x H x D)		237 × 172 × 45 mm
Front cutout (W x H)		214.5 × 160.5 mm
Connection		screw/plug terminals 2.5 mm ²
Front		insulating surface
Sealing Front Back		IP65 (with screw fastening) IP20
Weight		approx. 0,850 g
Disturbance test (CE)		tested according to applicable IEC standards
Approvals		  File No.E527936

Subject to alterations, errors excepted. Subject to technical modifications. This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Company contractual or warranty obligation unless expressly stated in a written sales contract.
© Woodward 2025, All Rights Reserved

