

HighPROTEC I

PROTECTION TECHNOLOGY
MADE SIMPLE

MRU4 I

VOLTAGE AND
FREQUENCY RELAY

NEW FEATURES – Release 3.6

- VDE-AR-N 4110
- G99 Issue 1 Amendment 3
- Wattmetric Ground Fault Protection
- IEC 60870-5-104
- SCADApter for Retrofit
- Usability improvements
- IT Security
- Improved Frequency and ROCOF precision*



APPLICATION

The MRU4 is a protection relay which uses the latest Dual-Core-Processor Technology to provide precise and reliable protective functions and is very easy to operate. It is designed to protect electrical equipment from dangerous voltage fluctuations. For example protection against under voltages caused by mains shortcircuits, or overvoltages due to load shedding or failure of a generator voltage controller. Its compact design makes the MRU4 ideal for installation within the LV terminal compartments of compact SF6-insulated MV systems. The protection functions of the MRU4 have been adapted to comply with the requirements of the VDE-AR-N-4110:2018.

ALL INCLUSIVE:

- All protection features inclusive
- Parameter setting software
- Disturbance analysis software

COMPREHENSIVE FREQUENCY PROTECTION PACKAGE

Each of the six elements can be used as:

- f< or f> (over- and underfrequency supervision)
- df/dt (ROCOF)
Rate of change of frequency
- (f< and df/dt) or (f> and df/dt)
Combination of over-, under- and rate of change of frequency (ROCOF)
- (f< and DF/DT) or (f> and DF/DT)
Combination of over-, under- and increase of frequency
- Delta Phi (Vector surge)

SIX ELEMENTS VOLTAGE PROTECTION

- Under- and overvoltage
- Programmable time dependent undervoltage tripping characteristic
- Wattmetric Ground Fault Protection

SLIDING-MEAN-SQUARE SUPERVISION

- Adjustable (VDE-AR 4105)

FRT (LRVT)

- Adjustable LRVT-profiles
- Optionally AR-controlled

FLEXIBLE FOURTH VOLTAGE MEASURING INPUT

- 2 elements VE> or VX (for Synch Check)

SYNCH CHECK

- Generator-to-System, System-to-System
- Options to switch onto dead bus bars

TWO ELEMENTS RESIDUAL VOLTAGE PROTECTION

- VE>

SIX ELEMENTS VOLTAGE ASYMMETRY SUPERVISION

- Under- and overvoltage in positive phase sequence system, overvoltage in negative phase sequence system

POWER QUALITY

- THD-protection

SUPERVISION

- Voltage transformer supervision
- Trip circuit supervision
- CBF via position indicators

RECORDERS

- Disturbance recorder: 120 s non volatile
- Fault recorder: 20 faults
- Event recorder: 300 events
- Trend recorder: 4000 non volatile entries

PC TOOLS

- Setting and analyzing software
Smart view for free
- Including page editor to design own pages

LOGIC

- Up to 80 logic equations for protection, control and monitoring

COMMISSIONING SUPPORT

- USB connection
- Customizable Display (Single-Line, ...)
- Customizable Inserts
- Copy and compare parameter sets
- Configuration files are convertible
- Forcing and disarming of output relays
- Fault simulator
- Graphical display of tripping characteristics
- 8 languages selectable within the relay

COMMUNICATION OPTIONS

- IEC 61850, IEC 60870-5-103, Profibus DP
- IEC60870-5-104
- Modbus RTU and/or Modbus TCP
- DNP 3.0 (RTU, TCP, UDP)
- SCADApter for Retrofit

IT SECURITY

- Menu for the activation of BDEW-Whitepaper-compliant security settings (e.g. hardening of interfaces)
- IT Security Logger
- Syslog (to centralized server)
- Encrypted connection with Smart view

ADDITIONAL HIGHLIGHTS

- Plausibility checks
- Status display
- Comprehensive measured values and statistics
- Masking of unused functions
- Multi-Password-Level

CONTROL

- One breaker
- Breaker wear

TIME SYNCHRONISATION


- SNTP, IRIG-B00X, Modbus, DNP 3.0, IEC 60870-5-103/104

*5 mHz from 45-55 Hz

FUNCTIONAL OVERVIEW

	Elements	ANSI
Protective Functions		
V>, V<, V<(t) under- and overvoltage protection, programmable time dependent undervoltage tripping characteristic	6	27, 59
FRT (optional coordination with AR-feature)	1	27 (t, AR)
Synchronism check	1	25
Each of the six frequency protection elements can be used as:	6	
→ f< or f> (over- and under frequency supervision)		81U/O
→ df/dt rate of change of frequency (ROCOF)		81R
→ (f< and df/dt) or (f> and df/dt) combination of over-, under- and rate of change of frequency (ROCOF)		
→ (f< and DF/DT) or (f> and DF/DT) combination of over-, under- and increase of frequency		
→ Delta Phi (Vector surge)		78
VE, residual voltage protection	2	59N
Voltage asymmetry supervision (V012) V1, under and overvoltage in positive phase sequence system V2, overvoltage in negative phase sequence system	6	47
ExP, External alarm and trip functions	4	
10-Minutes-Mean-Square-Sliding Supervision: adjustable according to VDE-AR 4105		
Control and Logic		
Control: Position indication, supervision time management and interlockings for 1 breaker		
Logic: Up to 80 logic equations, each with 4 inputs, selectable logical gates, timers and memory function		
Supervision Functions		
CBF, circuit breaker failure protection (via position indicators)	1	62BF
TCS, trip circuit supervision	1	74TC
VTS, voltage transformer supervision by comparing phase and residual voltages	1	60FL
VTS, fuse failure protection via digital input	1	60FL
THD supervision		

FUNCTIONAL OVERVIEW IN ANSI FORM

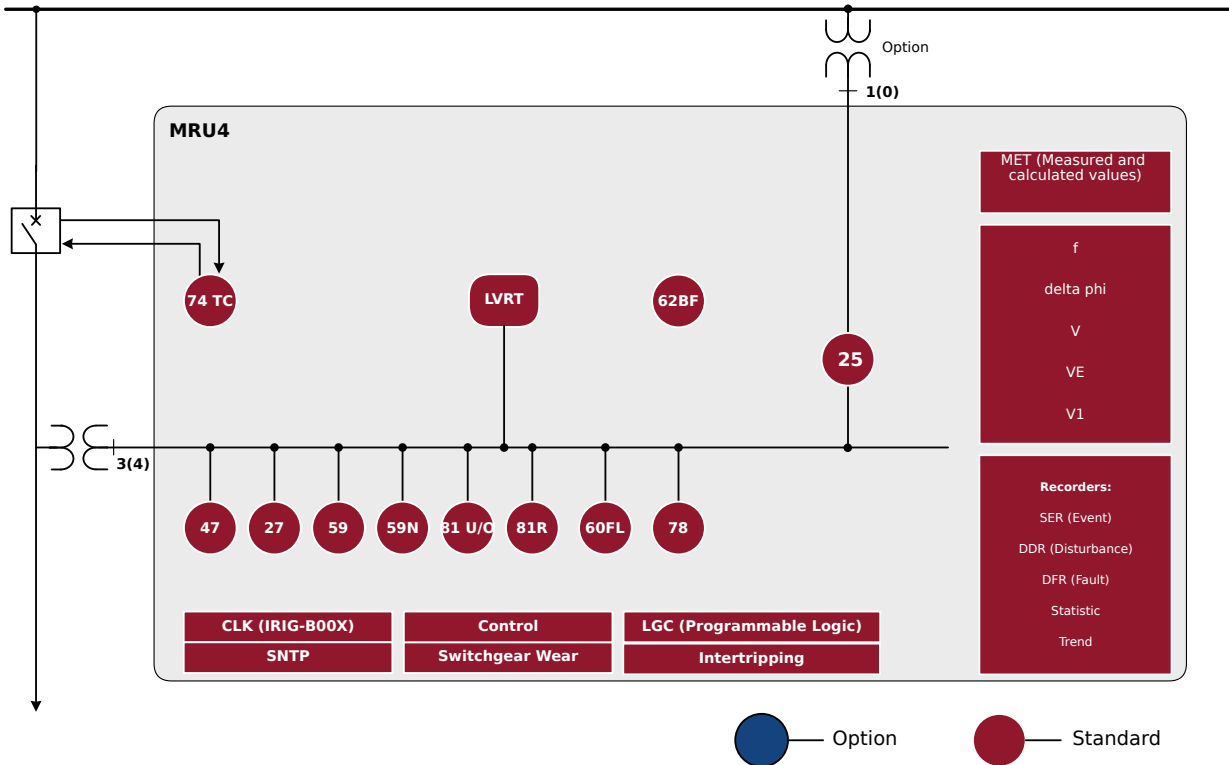

APPROVALS



certified regarding UL508
(Industrial Controls)



certified regarding
CSA-C22.2 No. 14
(Industrial Controls)



certified by EAC
(Eurasian Conformity)



Type tested (and certified)
regarding IEC60255-1



Component certificate regarding
the German grid code standard
VDE-AR-N 4110 (2018-11)




KESCO
동일성 선언서
(Declaration of Identity)



Type Approval Certificate from
CQC China

CONNECTIONS (EXAMPLE)

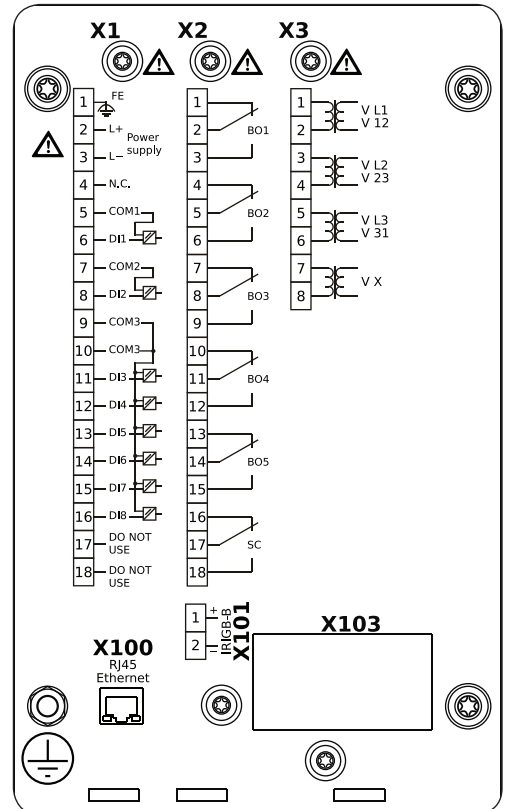

Complies with "Engineering Recommendation G99 Issue 1 Amendment 3 – July 2018".
Complies with IEEE 1547-2003.
Amended by IEEE 1547a-2014.
Complies with ANSI C37.90-2005.

ORDER FORM MRU4

Voltage and Frequency supervision				MRU4	-2	A	0			
Version 2 with USB, enhanced communication and user options										
Digital Inputs	Binary output relays	Housing	Large display							
8	6	B1	-							
Hardware variant										
Standard										
Housing and mounting										
Housing suitable for door mounting									A	
Housing suitable for 19" rack mounting **									B	
Communication protocol										
Without protocol									A	
Modbus RTU, IEC 60870-5-103, DNP3.0 RTU <i>RS485/terminals</i>									B*	
Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104 <i>Ethernet 100 MB/RJ45</i>									C*	
Profibus-DP <i>optic fiber/ST-connector</i>									D*	
Profibus-DP <i>RS485/D-SUB</i>									E*	
Modbus RTU, IEC 60870-5-103, DNP 3.0 RTU <i>optic fiber/ST-connector</i>									F*	
Modbus RTU, IEC 60870-5-103, DNP 3.0 RTU <i>RS485/D-SUB</i>									G*	
IEC 61850, Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104 <i>Ethernet 100MB/RJ45</i>									H*	
IEC 60870-5-103, Modbus RTU, DNP 3.0 RTU <i>RS485/terminals</i>									I*	
Modbus TCP, DNP 3.0 TCP/UDP, IEC60870-5-104 <i>Ethernet 100 MB/RJ45</i>									K*	
IEC 61850, Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104 <i>Optical Ethernet 100MB/LC duplex connector</i>									L*	
Modbus TCP, DNP 3.0 TCP/UDP, IEC 60870-5-104 <i>Optical Ethernet 100MB/LC duplex connector</i>									T*	
IEC 60870-5-103, Modbus RTU, DNP 3.0 RTU <i>RS485/terminals</i>										
IEC 61850, Modbus TCP, DNP 3.0 TCP/UDP, IEC60870-5-104 <i>Ethernet 100 MB/RJ45</i>										
Harsh Environment Option										
None									A	
Conformal Coating									B	
Available menu languages (in every device)										
English / German / Spanish / Russian / Polish / Portuguese / French / Romanian										

* Within every communication option only one communication protocol is usable.
Smart view can be used in parallel via the Ethernet interface (RJ45).

The parameterizing- and disturbance analyzing software Smart view is included in the delivery of HighPROTEC devices.

Voltage inputs	4 (0–800 V) with automatic CT Disconnect
Digital inputs	Switching thresholds adjustable via software
Power supply	Wide range power supply 24 V _{DC} – 270 V _{DC} / 48 V _{AC} – 230 V _{AC} (–20/+10%)
Terminals	All terminals plug type
Mounting	Door mounting
Type of enclosure (Front)	IP54
Dimensions of housing (W x H x D)	19" flush mounting: 141.5 mm x 173 mm x 209 mm 5.571 in. x 6.811 in. x 8.228 in. Door mounting: 141.5 mm x 183 mm x 209 mm 5.571 in. x 7.205 in. x 8.228 in.
Weight (max. components)	approx. 2.4 kg

19" Variants Available! **



<http://wwdmanuals.com/hpt-2>

CONTACT:

North & Central America

Phone: +1 970 962 7272

+1 208 278 3370

E-mail: SalesPGD_NAandCA@woodward.com

South America

Phone: +55 19 3708 4760

E-mail: SalesPGD_SA@woodward.com

Europe

Phone (Kempen): +49 2152 145 331

Phone (Stuttgart): +49 711 78954 510

E-mail: SalesPGD_EMEA@woodward.com

Middle East & Africa

Phone: +971 2 678 4424

E-mail: SalesPGD_EMEA@woodward.com

Russia

Phone: +49 711 78954 515

E-mail: SalesPGD_EMEA@woodward.com

China

Phone: +86 512 8818 5515

E-mail: SalesPGD_CHINA@woodward.com

India

Phone: +91 124 4399 500

E-mail: Sales_India@woodward.com

ASEAN & Oceania

Phone: +49 711 78954 510

E-mail: SalesPGD_ASEAN@woodward.com

For more information please contact:

© Woodward

All Rights Reserved | 05/2019