

EASYGEN-3000XT FLASH INSTRUCTION

#37630 REV. B

Flashing a Woodward easYgen-3000XT (and related controls as LS-6XT, easY-I and GC-3400XT) for full or partial update.

**CAUTION**

For trained personnel only!
Updating the device software needs expert level. Otherwise, the device can become unusable or even cause error function that can lead into dangerous situation with genset.

**CAUTION**

DO NOT switch off the device until the flash procedure is explicitly mentioned as completely finished as described below

**WARNING**

If the device to be updated is installed into a running genset system, it is mandatory that a genset control expert guarantees trouble free system setup during update process.

**IMPORTANT**

If firmware update process is however interrupted before it has finished, due to lost or switched off power supply, your device may be no longer able to operate.
Note that you perform firmware update at your own risk.

What to do?

The updating process comes with conditions which require certain preparations, ask for step-by-step procedure, and will be closed with some final preparations.

First, read this instruction manual completely and carefully, before you start updating your device.

PRECONDITIONS

The following conditions are mandatory BEFORE updating a device:

- PC or laptop computer with the latest version of Woodward software ToolKit installed
 - Get the latest version [HERE](#)
- Appropriate configuration files installed/copied on your computer
 - Get the suitable configuration file for your model [HERE](#)
- Powered up easYgen-3000XT (12/24 V) but
 - without any(!) genset control operation
 - without communicating to other devices
- PC or laptop computer connected to the device via the preferred interface type and cable
- Current version of update file *.scp, according to the actual device and the preferred interface.
 - Get the latest version [HERE](#)

There are two possible ways to update the easYgen-3000XT:

- via USB interface
- via Ethernet interface

We recommend using the Ethernet variant for the update procedure.

Depending on the way, you want to conduct the update you may receive an appropriate file:

- File for USB: "...usb.scp".
- File for Ethernet: "...eth.scp".

For each interface, it is mandatory to use the appropriate file!

PREPARATIONS


EASYGEN-3000XT

- Select operation mode "STOP"
- Ensure that "running gensets" are controlled by other genset control(s)
- Remove all interface connections, except the connection for updating the device

TOOLKIT

- Save your current settings as *.wset file on your computer to ensure re-storing it later


- 1 Start ToolKit software
- 2 Open the appropriate configuration file (*.wtool) which fits to your device
- 3 Click the "Connect" icon
 - Connection selection sub window opens

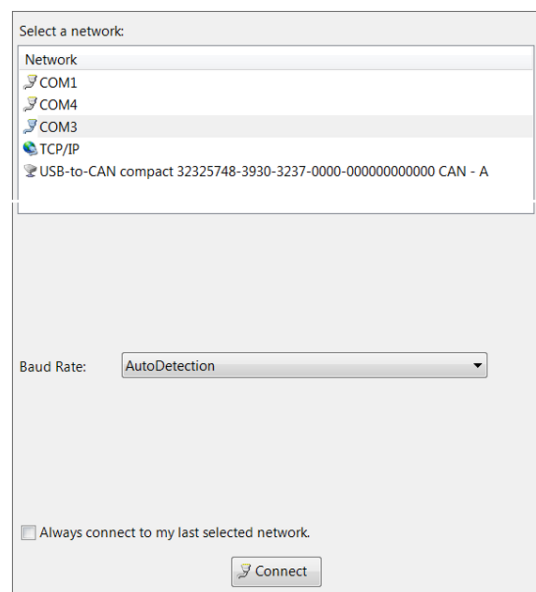

- 4 Select the appropriate interface for the device which is supposed to be flashed for (partial) update
 - Login screen appears
- 5 **Login with user name and password for Code Level 5 is required!**


(Factory default - Username: CL05; Password: CL0500)

- After Log-In, HOME PAGE now displays data and actual status from the connected device

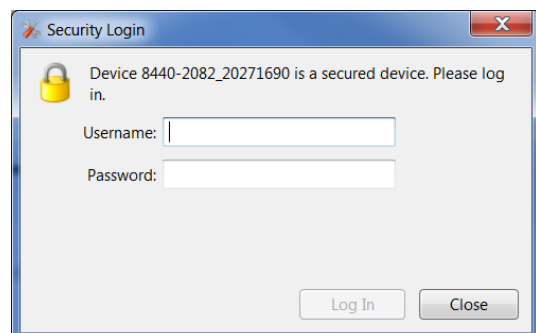


UPDATE PROCEDURE

- 1 In "Main" menu, Select "Load Application" and follow the instructions
- Load Application sub window opens

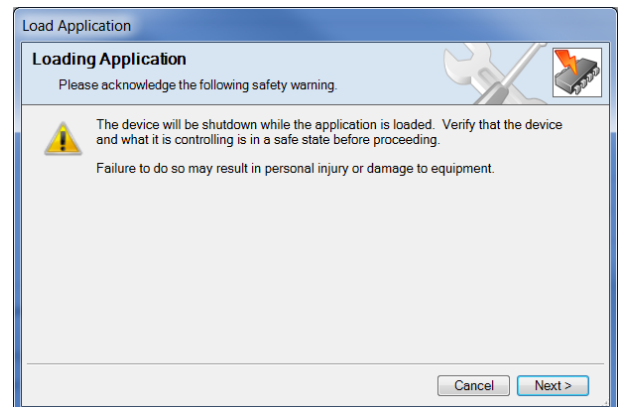


- 2 Continue with "Next"
- Application File Selection window opens
- 3 Click "Browse" and select the provided *.scp file. If available, select _eth.scp or _usb.scp with respect to the appropriate interface to which you are connected now

Continue with "Next"
- Restore Settings windows opens

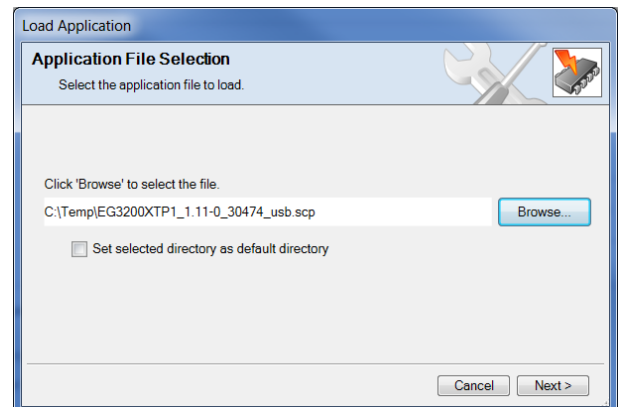

- 4 Please ensure that your settings are saved e.g., by checking the "Restore ..." box

Continue with "Next"

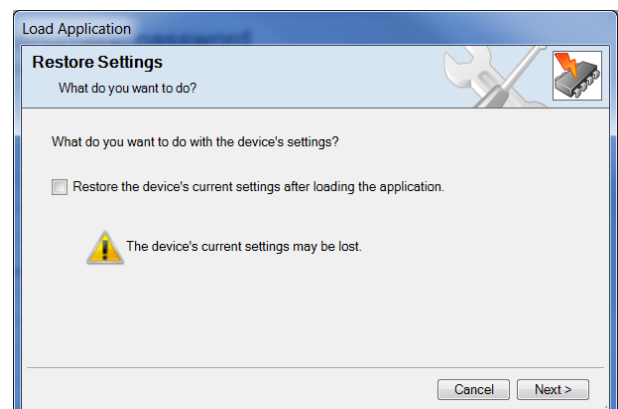


- 5 Update via USB: Continue at Step 6
 Update via Ethernet: "Select Device" window appears.

Notes!

Ensure that the device will **NOT BE SWITCHED OFF** during update process before you click "Next"!

Select you device if not already selected and click "Next"

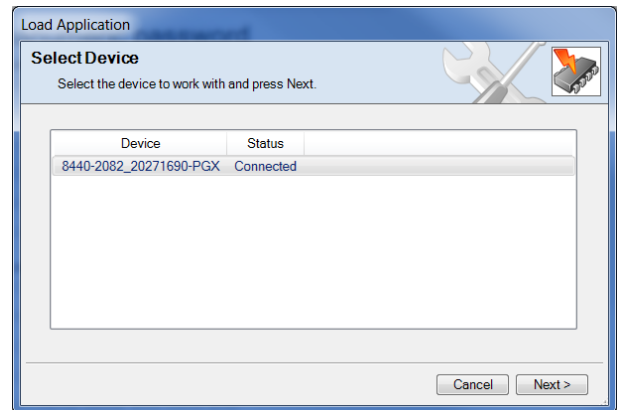


Notes!

If next window says "Failed":

In this case the actually entered code is below Code Level 5.
 Click "Close" then "Disconnect" in ToolKit window.
 Go back to Chapter "Preparations" step 4 and login with code for Code Level 5

If "Production Identifier Mismatch" window appears:

The .scp file you have selected does not fit to the hardware of that device.
 Click "Cancel" and check the selected file in step 3.

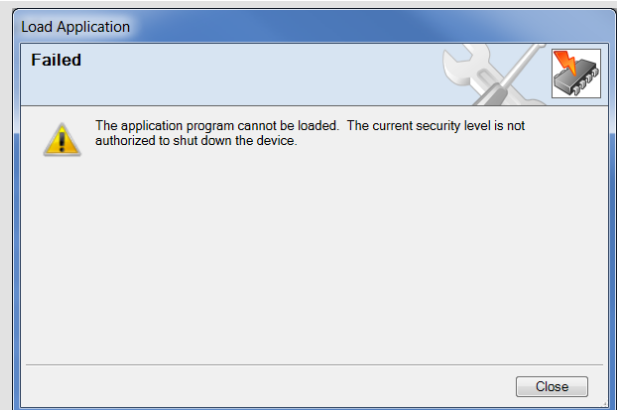


- 6 The update process has now started, and ToolKit transfers the file to the memory of the device.
 easYgen-3000XT with display:
 The device switches off the display. Furthermore, "Ready for operation" relay de-energizes.
 The buttons TEST, STOP, AUTO, MAN and the yellow alarm LED are illuminated
- easYgen-3000XT with LEDs (metal housing):
 LEDs "Communication" and "Operation" turn red. Furthermore, "Ready for operation" relay de-energizes.

Via Ethernet, the transfer takes about 6 - 9 minutes.

Via USB, the transfer takes about 15 – 18 minutes.

Still valid: **DO NOT SWITCH OFF THE DEVICE!**

Wait until the bar graph is completed.

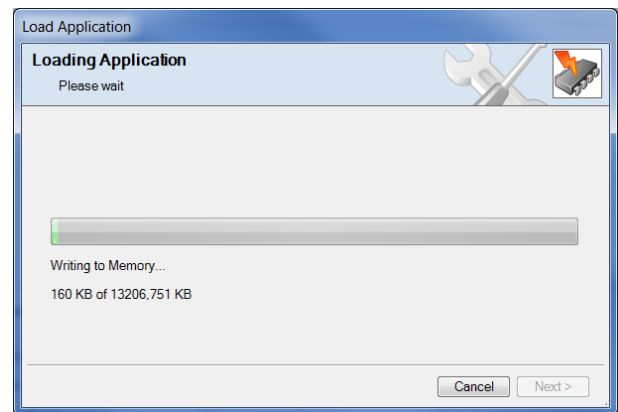


Afterwards "Reconnecting to device application" will appear

DO NOT click "Close"!

Leave that window as it is for now!

DO NOT switch off the device!

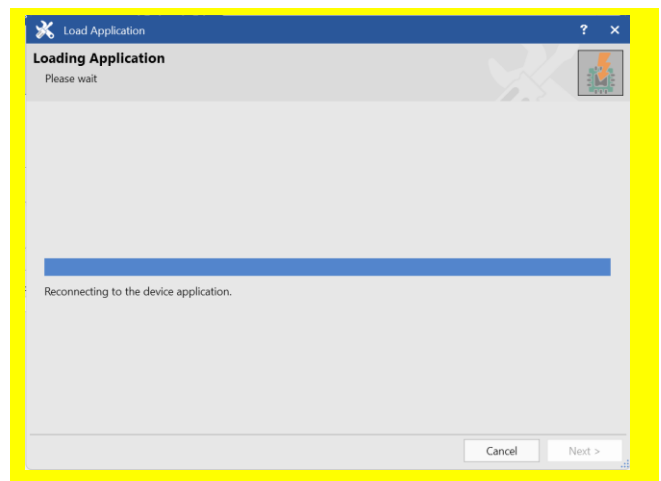


- 7 Now the device will reboot **automatically** and continues the update process.
easYgen-3000XT with display:

During the reboot, the display of the device will show in RED:

“Updating: Please do not switch off the device!”
The bar graph shows the progress of the update action

DO NOT SWITCH OFF THE DEVICE!

This process will finish after about 4-5 minutes

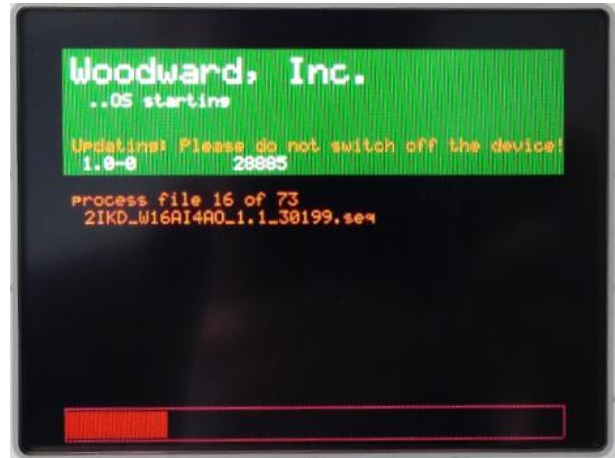

easYgen-3000XT with metal housing:

LEDs “Communication” and “Operation” stay still red.

DO NOT switch off the device!

After about 30 seconds, the LEDs will start blinking in turn for about 2:30 minutes.

Afterwards both LEDs again turn red for a moment.

DO NOT switch off the device!


- 8 After the device has finished the previous step, it will perform automatically again a reboot.
Now the device starts with the new software version.

Update has finished completely after the device has started the application, and the easYgen-3000XT with display shows the Home Screen on the HMI as usual.

In easYgen-3000XT with metal housing, the “Operation” LED turns to green, as usual. If there is an alarm active, LED toggles green/red, as usual.

Now the window “Application loaded successfully” can be closed

Click “Close”

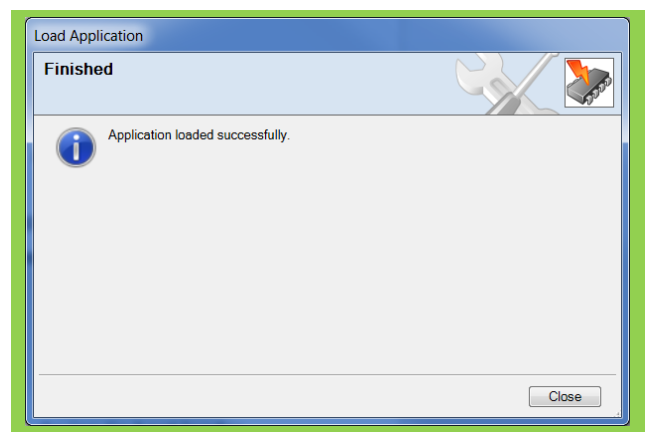

Check the version


In ToolKit: Navigate to “STATUS MENU” → “Diagnostic” – “Version”

Via HMI: “Next Page” → “Diagnostic” → “Version”

The “Application”, “HMI”, “Bitmap” and “Language” must have the same version.

If there is any discrepancy, there will show an exclamation mark besides the respective version

HMI Screen:

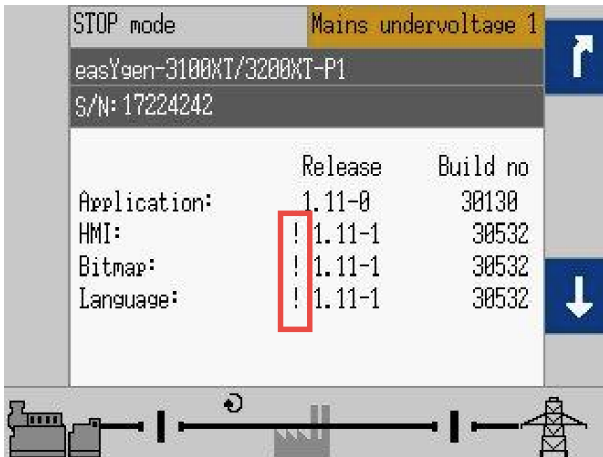

	Release	Build no
Application:	1.11-0	30130
HMI:	! 1.11-1	30532
Bitmap:	! 1.11-1	30532
Language:	! 1.11-1	30532

ToolKit screen



S/N - Serial Number:		900	17224242
	Release	Build no	
Application:	930	1.11-0	30130
HMI:	938	! 1.11-1	30532
Bitmap:	939	! 1.11-1	30532
Language:	941	! 1.11-1	30532

HMI screen

In this case, please contact your sales support partner to fix the problem.

For further Product Support Options, Product Service Options, Returning Equipment for Repair, and/or Engineering Services please [download application note #37573](#).

Close update

Ensure latest (saved) setting

- Check whether your latest specific settings are still/again loaded. If not:
- Re-load your latest saved settings or execute “factory settings”

Undo temporary safety preparations

- Re-connect all interface connections that have not been necessary for the flash update process

Device is updated and ready for use!

- Start your application

We appreciate your comments about the content of our publications.

Please send comments to: industrial.support@woodward.com

Please reference publication 37630.

Homepage
www.woodward.com

**Woodward has company-owned plants, subsidiaries, and branches,
as well as authorized distributors and other authorized service and sales facilities throughout the world.
Complete address / phone / fax / email information for all locations is available on our website.**

THE INFORMATION CONTAINED IN THIS APPLICATION NOTE IS PROVIDED AS IS WITHOUT REPRESENTATIONS OR WARRANTIES OF ANY KIND EXPRESSED OR IMPLIED. THE ADHERENCE TO THE INFORMATION CONTAINED IN THIS APPLICATION NOTE SHALL BE AT THE USER'S OWN RISK. WOODWARD EXPRESSLY DISCLAIMS ANY REPRESENTATIONS OR WARRANTIES CONCERNING WHETHER THE DELIVERABLES, OR SOFTWARE WILL PRODUCE ANY SPECIFIC RESULT OR PERFORM ANY PARTICULAR FUNCTION. WOODWARD FURTHER EXPRESSLY DISCLAIMS ANY LIABILITY FOR DAMAGES, LOSSES, COSTS OR EXPENSES ARISING DIRECTLY OR INDIRECTLY FROM THE USE OF THIS APPLICATION NOTE, UNLESS WOODWARD HAS PROVABLY ACTED WITH WILLFUL MISCONDUCT OR GROSS NEGLIGENCE.

WOODWARD RESERVES THE RIGHT TO UPDATE ANY PORTION OF THIS PUBLICATION AT ANY TIME. INFORMATION PROVIDED BY WOODWARD IS BELIEVED TO BE CORRECT AND RELIABLE. HOWEVER, NO RESPONSIBILITY IS ASSUMED BY WOODWARD UNLESS OTHERWISE EXPRESSLY UNDERTAKEN.